


Overview

HPE ProLiant DL580 Gen10 Server

The HPE ProLiant DL580 Gen10 Server is a high-density, four-socket server with high performance, scalability and reliability, all in a 4U chassis. Supporting the latest 2nd generation of Intel® Xeon® Scalable processors, the HPE ProLiant DL580 Gen10 Server offers greater processing power, up to 6 TB of faster memory, IO of up to sixteen PCIe 3.0 slots, up to 12 TB of HPE Persistent Memory plus the intelligence and simplicity of automated management with HPE OneView and HPE iLO 5.


The HPE ProLiant DL580 Gen10 Server is the ideal server for business critical workloads, virtualization, server consolidation, database, business processing, graphics intensive and general 4P data-intensive applications where the right performance is paramount.

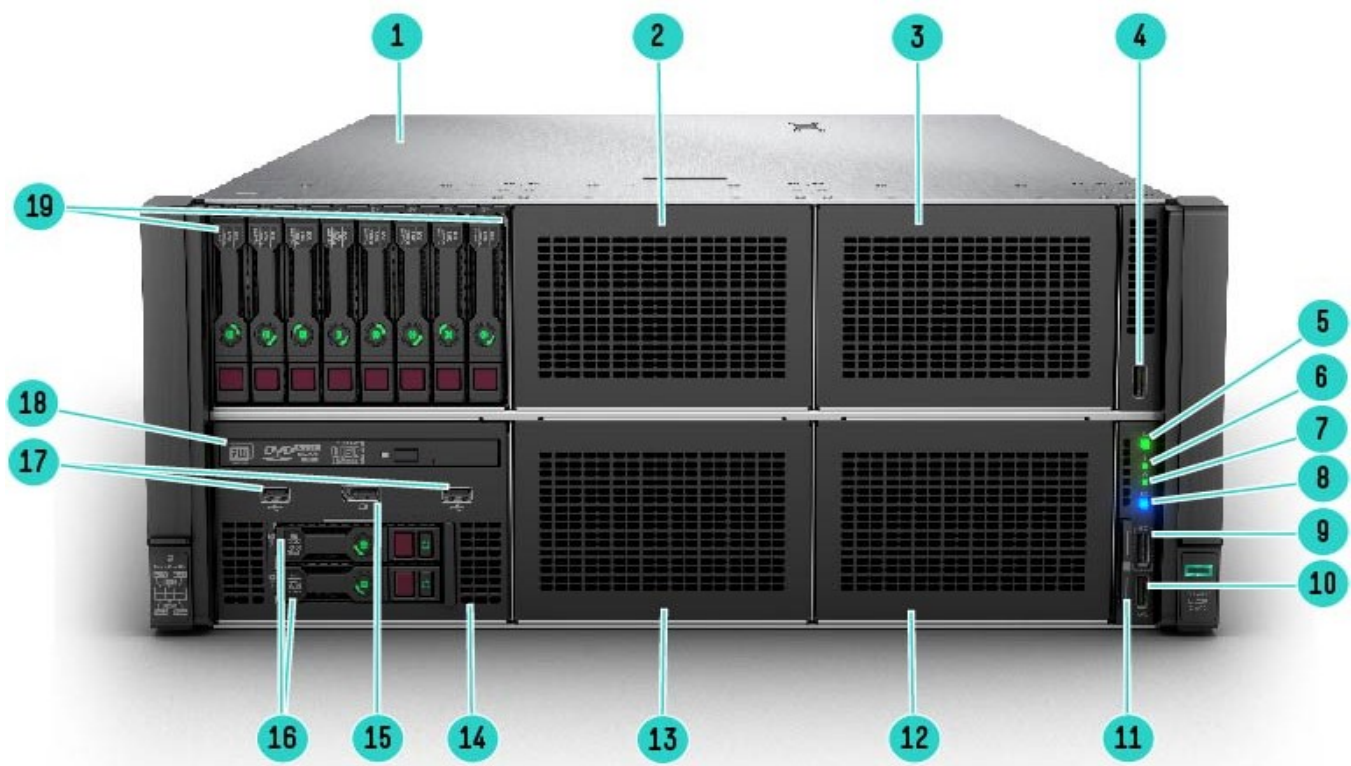

HPE ProLiant DL580 Gen10 Server Front View

- | | |
|--|--|
| 1. Quick removal access panel | 11. Serial label pull tag |
| 2. Box 2 (8 SFF or 6 SFF+2 NVMe or 8 NVMe SSD optional) | 12. Box 6 (8 SFF) |
| 3. Box 3 (8 SFF or 6 SFF+2 NVMe or 8 NVMe PCIe SSD optional) | 13. Box 5 (8 SFF) |
| 4. Front USB 3.0 port | 14. Box 4 (8 SFF or Universal Media bay) |
| 5. Power On/Standby button and system power LED button | 15. Optional front display port (via Universal Media Bay) |
| 6. Health LED | 16. Optional 2 SFF HDD, requires optional Universal Media bay |
| 7. NIC status | 17. Optional USB 2.0 (via Universal Media Bay) |
| 8. UID button | 18. Optical Drive (Optional) |
| 9. iLO Front Service Port (not available with SID) | 19. Box 1 (8 SFF or 6 SFF+2 NVMe or 8 NVMe (supports only 4 NVMe drives) SSD optional) |
| 10. Front USB 3.0 port | |

Overview

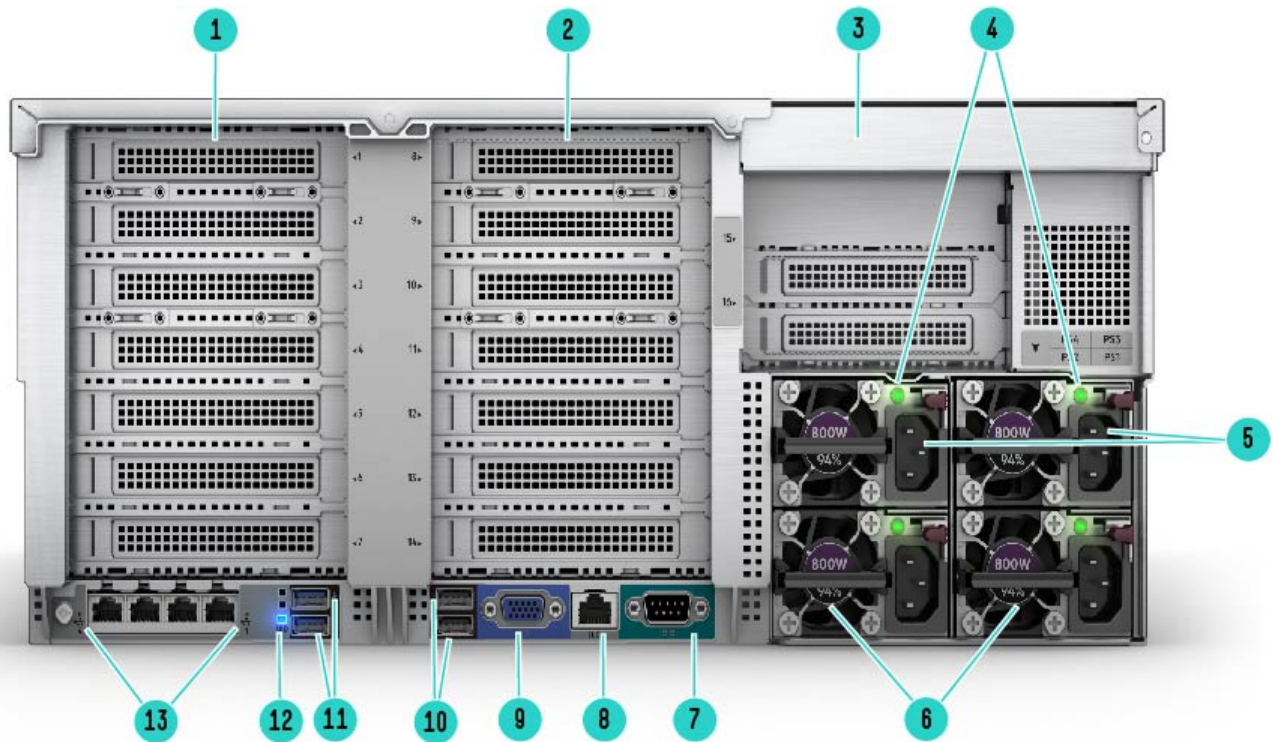


HPE ProLiant DL580 Gen10 Server Rear View

- | | |
|--|--|
| 1. PCIe Slots (Slots 1-7 top to bottom), requires primary riser | 8. Dedicated iLO network connector |
| 2. PCIe Slots (Slots 8-14 top to bottom), requires secondary riser (includes tertiary riser) | 9. VGA (video) connector |
| 3. PCIe Slots (Slots 15-16 top to bottom), requires tertiary riser (included with secondary riser) | 10. USB connectors 2.0 (2) |
| 4. Power supply Power LED (max. 4) | 11. USB connectors 3.0 (2) |
| 5. Power supply Power connection (max. 4) | 12. Unit ID LED |
| 6. HPE Flexible Slot Power Supply, 800W PS shown (max. 4) | 13. FlexibleLOM ports (Port 1 on right side) |
| 7. Serial connector | |



Overview

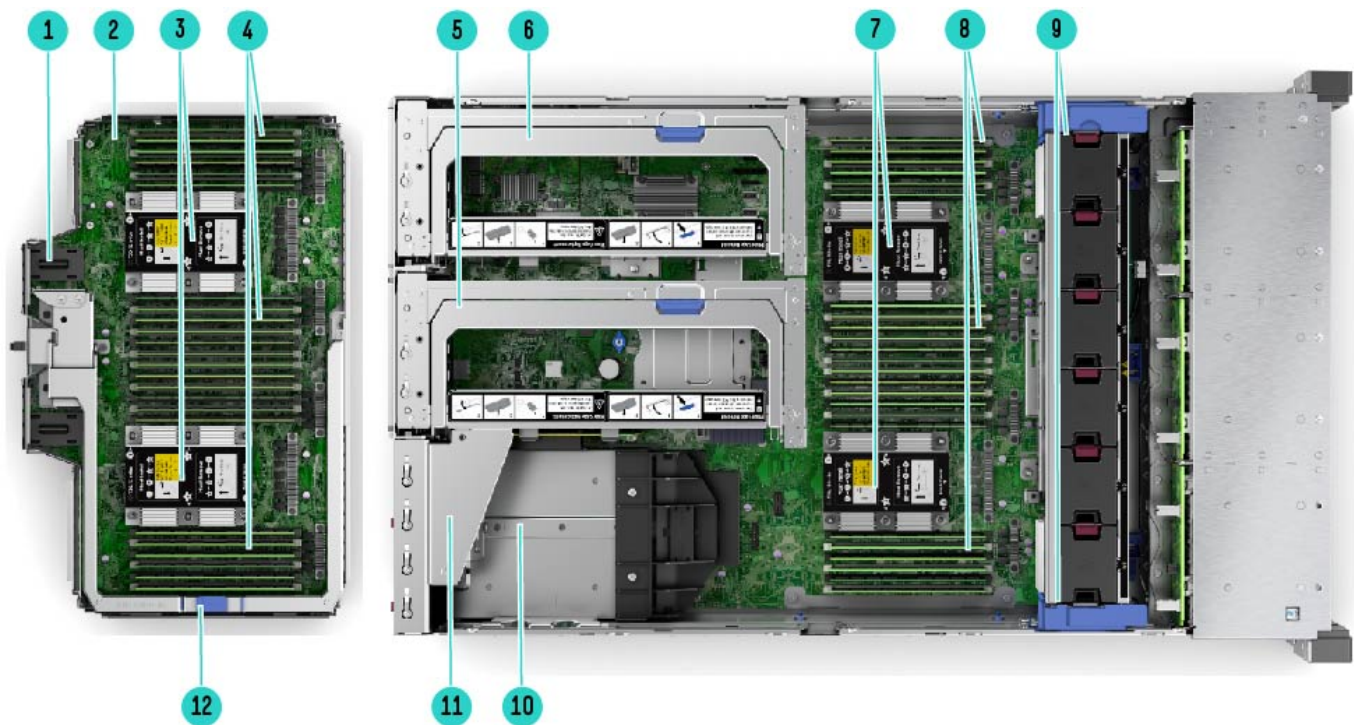

HPE ProLiant DL580 Gen10 Server Internal View with upper CPU mezzanine tray

- | | |
|---|--|
| 1. Left connector used for DL580 4-port NVMe Mezzanine card (Daughter card) | 7. 2 Processors |
| 2. Upper CPU Mezzanine Board Kit | 8. DDR4 DIMM slots on CPU board kit. Shown fully populated in 24 slots (12 per processor) under the air baffle |
| 3. 2 Processors, heatsink showing on upper CPU mezzanine board kit | 9. Fan cage shown with 12 standard Hot-plug fans |
| 4. DDR4 DIMM slots. Shown fully populated in 24 slots (12 per processor) | 10. (Under) Max. 4 Hot Plug redundant HPE Flexible Slot Power supplies |
| 5. Optional secondary PCIe riser (includes tertiary riser) | 11. Optional Tertiary riser (included with secondary riser) |
| 6. Primary PCIe riser | 12. Handle for removing upper CPU Mezzanine Board Kit |

What's New

- Support NVMe U.3 SSDs



Overview

Platform Information

Form Factor

- 4U Rack Form Factor
Entry, Base and Performance pre-configured models and Configure-to-order server ship with Gen10 Rail Kits and Cable Management Assembly

Chassis Types

- 48 SFF with optional Universal Media Bay

Notes:

- The Universal Media Bay (872267-B21) is not available with the 48 SFF front end, and can only be populated in Box 4.
- All pre-configured models come with embedded software RAID support for 10 SATA drives. Optional HPE Smart Array Controllers can be added.

System Fans

- 12 Hot Plug Fans (with N+1 redundancy)

Notes: 12 hot plug fans are shipped as standard.



Standard Features

Processors

One, two, three or four of the following depending on model.

Notes:

- The 2nd digit of the processor model number “x1xx” and “x2xx” is used to denote the processor generation (i.e. 1=1st generation and 2=2nd generation)
- This table covers the public Intel offering only.
- For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

| Processor Suffix | Description | Offering |
|------------------|----------------------|--|
| L | Large memory tier | Up to 4.5 TB addressable memory per socket |
| M | Medium memory tier | Up to 2.0 TB addressable memory per socket |
| N | NFV Optimized | Targeted at Network Function Virtualization (NFV) workloads. Intel® Speed Select Technology-Base Frequency improves performance by directing base frequency to high priority/bottleneck cores. |
| S | Search Optimized | Optimized base frequency to address ‘search’ workloads. |
| V | VM Density Optimized | Fosters enhanced VM density, allowing to support more/larger virtual machines per host. |
| Y | Speed Select | Intel® Speed Select Technology –Performance Profile increases base frequency when less cores are enabled. Allows greater flexibility, deployment options and platform longevity. |

Platinum Processors - 2nd Generation Intel® Xeon® Scalable Processor Family

| Intel Xeon Models | CPU Frequency | Cores | L3 Cache (MB) | Power | UPI | DDR4 | Memory per socket |
|--------------------------|---------------|----------|---------------|-------|---------------|-----------|-------------------|
| Platinum 8280L Processor | 2.7GHz | 28 | 38.5 | 205W | 3 @ 10.4 GT/s | 2933 MT/s | 4.5TB |
| Platinum 8280M Processor | 2.7GHz | 28 | 38.5 | 205W | 3 @ 10.4 GT/s | 2933 MT/s | 2TB |
| Platinum 8280 Processor | 2.7GHz | 28 | 38.5 | 205W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8276M Processor | 2.2GHz | 28 | 38.5 | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 2TB |
| Platinum 8276L Processor | 2.2GHz | 28 | 38.5 | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 4.5TB |
| Platinum 8276 Processor | 2.2GHz | 28 | 38.5 | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8270 Processor | 2.7GHz | 26 | 35.75 | 205W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8268 Processor | 2.9GHz | 24 | 35.75 | 205W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8260M Processor | 2.4GHz | 24 | 35.75 | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 2TB |
| Platinum 8260L Processor | 2.4GHz | 24 | 35.75 | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 4.5TB |
| Platinum 8260Y Processor | 2.4GHz | 24/20/16 | 35.75 | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8260 Processor | 2.4GHz | 24 | 35.75 | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8256 Processor | 3.8GHz | 4 | 16.5 | 105W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8253 Processor | 2.2GHz | 16 | 22 | 125W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |



Standard Features

| Gold Processors - 2nd Generation Intel® Xeon® Scalable Processor Family | | | | | | | |
|---|---------------|----------|---------------|-------|---------------|----------|-------------------|
| Intel Xeon Models | CPU Frequency | Cores | L3 Cache (MB) | Power | UPI | DDR4 | Memory per socket |
| Gold 6256 Processor | 3.6GHz | 12 | 33 | 205W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6254 Processor | 3.1GHz | 18 | 24.75 | 200W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6252 Processor | 2.1GHz | 24 | 35.75 | 150W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6252N Processor | 2.3GHz | 24/20/16 | 35.75 | 150W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6248 Processor | 2.5GHz | 20 | 27.5 | 150W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6246 Processor | 3.3GHz | 12 | 24.75 | 165W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6244 Processor | 3.6GHz | 8 | 24.75 | 150W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6242 Processor | 2.8GHz | 16 | 22 | 150W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6240L Processor | 2.6GHz | 18 | 24.75 | 150W | 3 @ 10.4 GT/s | 2933MT/s | 4.5TB |
| Gold 6240M Processor | 2.6GHz | 18 | 24.75 | 150W | 3 @ 10.4 GT/s | 2933MT/s | 2TB |
| Gold 6240 Processor | 2.6GHz | 18 | 24.75 | 150W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6240Y Processor | 2.6GHz | 18/14/8 | 24.75 | 150W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6238L Processor | 2.1GHz | 22 | 30.25 | 140W | 3 @ 10.4 GT/s | 2933MT/s | 4.5TB |
| Gold 6238M Processor | 2.1GHz | 22 | 30.25 | 140W | 3 @ 10.4 GT/s | 2933MT/s | 2TB |
| Gold 6238 Processor | 2.1GHz | 22 | 30.25 | 140W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6234 Processor | 3.3GHz | 8 | 24.75 | 130W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6230 Processor | 2.1GHz | 20 | 27.5 | 125W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6230N Processor | 2.3GHz | 20 | 27.5 | 125W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6226 Processor | 2.7GHz | 12 | 19.25 | 125W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6262V Processor | 1.9GHz | 24 | 33 | 135W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 6222V Processor | 1.8GHz | 20 | 27.5 | 115W | 3 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 5222Processor | 3.8GHz | 4 | 16.5 | 105W | 2 @ 10.4 GT/s | 2933MT/s | 1TB |
| Gold 5220 Processor | 2.2GHz | 18 | 24.75 | 125W | 2 @ 10.4 GT/s | 2666MT/s | 1TB |
| Gold 5220S Processor | 2.7GHz | 18 | 24.75 | 125W | 2 @ 10.4 GT/s | 2666MT/s | 1TB |
| Gold 5218B Processor | 2.3GHz | 16 | 22 | 125W | 2 @ 10.4 GT/s | 2666MT/s | 1TB |
| Gold 5218N Processor | 2.3GHz | 16 | 22 | 110W | 2 @ 10.4 GT/s | 2666MT/s | 1TB |
| Gold 5218 Processor | 2.3GHz | 16 | 22 | 125W | 2 @ 10.4 GT/s | 2666MT/s | 1TB |
| Gold 5217 Processor | 3.0GHz | 8 | 11 | 115W | 2 @ 10.4 GT/s | 2666MT/s | 1TB |
| Gold 5215L Processor | 2.5GHz | 10 | 13.75 | 85W | 2 @ 10.4 GT/s | 2666MT/s | 4.5TB |
| Gold 5215M Processor | 2.5GHz | 10 | 13.75 | 85W | 2 @ 10.4 GT/s | 2666MT/s | 2TB |
| Gold 5215 Processor | 2.5GHz | 10 | 13.75 | 85W | 2 @ 10.4 GT/s | 2666MT/s | 1TB |

Notes:

- Platinum – 82xx series - 2 and 4 socket capable, 3UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2933 MT/s 1DPC, 1 TB memory capacity (up to 2 TB on 'M' SKUs and up to 4.5 TB on 'L' SKUs), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (2x 512-bit FMA), 48 lanes PCIe 3.0, advanced RAS.
- Gold – 62xx and 52xx series - 2 and 4 socket capable, 3UPI @ 10.4 GT/s on 62xx processors, 2UPI @ 10.4 GT/s on 52xx processors, 6 Channel DDR4 @ 2933 MT/s 1DPC on 62xx and 5222 processors, 6-Channel DDR4 @ 2666 MT/s on 52xx processors, 1 TB memory capacity (up to 2 TB on 'M' SKUs and up to 4.5 TB on 'L' SKUs), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA) (SKU 5222 supports 2x 512 bit FMA), 48 lanes PCIe 3.0, advanced RAS.
- With the current HPE DDR4 SmartMemory maximum offering (128GB LRDIMMs), the 'L' SKUs and 'M' SKUs can support up to 1.5TB per socket.
- More than 1.5TB per socket requires the use of HPE Persistent Memory kits : available in 512GB, 256GB and 128GB
- Platinum 8260Y and Gold 6240Y processors support Intel® Speed Select Technology –Performance Profile
- Gold 5218B processor and Gold 5218 processor have the same specifications and cannot be mixed within a server.
- Gold 6252N, 6230N and 5218N processor are optimized for NFV (Network Function Virtualization) workloads and support Intel® Speed Select Technology –Base Frequency
- Gold 6262V and 6222V are VM density optimized, Gold 5220S is search-optimized
- 82xx, 62xx and 52xx processors offer VNNI (vector neural network instruction) instruction set.

Standard Features

| Platinum Processors – 1st Generation Intel® Xeon® Scalable Processor Family | | | | | | | |
|---|---------------|-------|---------------|-------|---------------|-----------|-------------------|
| Intel Xeon Models | CPU Frequency | Cores | L3 Cache (MB) | Power | UPI | DDR4 | Memory per socket |
| Platinum 8180M Processor | 2.5 GHz | 28 | 38.50 | 205W | 3 @ 10.4 GT/s | 2666 MT/s | 1.5TB |
| Platinum 8168 Processor | 2.7 GHz | 24 | 33.00 | 205W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8164 Processor | 2.0 GHz | 26 | 35.75 | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8160 Processor | 2.1 GHz | 24 | 33.00 | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8158 Processor | 3.0 GHz | 12 | 24.75 | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |

| Gold Processors - 1st Generation Intel® Xeon® Scalable Processor Family | | | | | | | |
|---|---------------|-------|---------------|-------|---------------|-----------|-------------------|
| Intel Xeon Models | CPU Frequency | Cores | L3 Cache (MB) | Power | UPI | DDR4 | Memory per socket |
| Gold 6154 Processor | 3.0 GHz | 18 | 24.75 | 200W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6152 Processor | 2.1 GHz | 22 | 30.25 | 140W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6150 Processor | 2.7 GHz | 18 | 24.75 | 165W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6148 Processor | 2.4 GHz | 20 | 27.50 | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6144 Processor | 3.5 GHz | 8 | 24.75 | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6140 Processor | 2.3 GHz | 18 | 24.75 | 140W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6137 Processor | 3.9 GHz | 8 | 24.75 | 205W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6136 Processor | 3.0 GHz | 12 | 24.75 | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6134M Processor | 3.2 GHz | 8 | 24.75 | 130W | 3 @ 10.4 GT/s | 2666 MT/s | 1.5TB |
| Gold 6134 Processor | 3.2 GHz | 8 | 24.75 | 130W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6132 Processor | 2.6 GHz | 14 | 19.25 | 140W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6130 Processor | 2.1 GHz | 16 | 22.00 | 125W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6126 Processor | 2.6 GHz | 12 | 19.25 | 125W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 5120 Processor | 2.2 GHz | 14 | 19.25 | 105W | 2 @ 10.4 GT/s | 2400 MT/s | 768GB |
| Gold 5118 Processor | 2.3 GHz | 12 | 16.50 | 105W | 2 @ 10.4 GT/s | 2400 MT/s | 768GB |
| Gold 5117 processor | 2.0 GHz | 14 | 19.25 | 105W | 2 @ 10.4 GT/s | 2400 MT/s | 768GB |
| Gold 5115 Processor | 2.4 GHz | 10 | 13.75 | 85W | 2 @ 10.4 GT/s | 2400 MT/s | 768GB |

Notes:

- Platinum 81xx series - 2 and 4 socket capable, 3UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2666 MT/s, 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (2x 512-bit FMA), 48 lanes PCIe 3.0, advanced RAS.
- Gold 61xx and 51xx series - 2 and 4 socket capable, 3UPI @ 10.4 GT/s on 61xx processors, 2UPI @ 10.4 GT/s on 51xx processors, 6-Channel DDR4 @ 2400 MHz (SKU 5122=supports 2666), 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA) (SKU 5122 supports 2x 512 bit FMA), 48 lanes PCIe 3.0, advanced RAS.
- All processors ship with a normal or a high performance heatsink.
- 82xx, 81xx, 62xx and 61xx processors support 3 UPI links and all processors are connected in a cross bar configuration with each processor connected to another directly in a four processor system. 52xx and 51xx processors support 2 UPI links only and all processors are connected in a ring configuration with processors 1, 3 and 2, 4 not connected directly in a four processor system.

Chipset

Intel C621 Chipset

Notes: For more information regarding Intel® chipsets, please see the following

URL: <http://www.intel.com/products/server/chipsets/>

On System Management Chipset

HPE iLO 5 ASIC

Notes: Read and learn more in the [iLO QuickSpecs](#).

Standard Features

Memory

One of the following depending on model

| | |
|-----------------------------|--|
| Type | SmartMemory Registered (RDIMM), Load Reduced (LRDIMM) |
| DIMM Slots Available | 48 12 DIMM slots per processor, 6 channels per processor, 2 DIMMs per channel |

With 2nd generation processors

| | | |
|---|----------------|--|
| Maximum capacity (LRDIMM) | 6 TB | 48 x 128 LRDIMM @ 2933 MT/s 2 DPC |
| Maximum capacity (RDIMM) | 1.5 TB 3 TB | 24 x 64 GB RDIMM @ 2933 MT/s 1 DPC 48 x 64 GB RDIMM @ 2666 MT/s 2 DPC |
| Maximum capacity (HPE Persistent Memory) | 12 TB | 24 x 512 GB Memory Kit @ 2666 MT/s |

With 1st generation processors

| | | |
|----------------------------------|--------|--------------------------------|
| Maximum capacity (LRDIMM) | 6 TB | 48 x 128 GB LRDIMM @ 2666 MT/s |
| Maximum capacity (RDIMM) | 1.5 TB | 48 x 32 GB RDIMM @ 2666 MT/s |
| Maximum capacity (NVDIMM) | 384 GB | 24 x 16 GB NVDIMM @ 2666 MT/s |

Notes:

- Only 2666 MT/s memory SKUs are supported with 1st generation processors (81xx,61xx and 51xx)
- Only 2933 MT/s memory SKUs are supported with 2nd generation processors (82xx,62xx and 52xx)
- HPE Persistent Memory is only supported on the 2nd generation processors
- Mixing of RDIMM and LRDIMM memory is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- Intel memory processors (with suffix M) are needed for supporting 1.5TB memory per socket on 1st generation processors
- Intel memory processors (with suffix M or suffix L) are needed for supporting more than 1 TB memory per socket on 2nd generation processors
- Maximum of 6 NVDIMMs are supported per processor on the 1st generation processors
- NVDIMM is not supported on the 2nd generation processors

Memory Protection

For details on the HPE Server Memory Options RAS feature, visit: <http://www.hpe.com/docs/memory-ras-feature>.

Expansion Slots

Primary 6-slot Riser (Optional) 872336-B21

| Expansion Slots # | Technology | Bus/Connector Width | Form Factor/Connector | Notes |
|-------------------|------------|---------------------|-------------------------|--------|
| 2 | PCIe 3.0 | x16 | Full length/full height | Proc 3 |
| 3 | PCIe 3.0 | x8 | Full length/full height | Proc 3 |
| 4 | PCIe 3.0 | x16 | Full length/full height | Proc 3 |
| 5 | PCIe 3.0 | x8 | ¾ length/full height | Proc 1 |
| 6 | PCIe 3.0 | x8 | ¾ length/full height | Proc 1 |
| 7 | PCIe 3.0 | x8 | ¾ length/full height | Proc 1 |
| None (J4) | NVMe | x8 | Slimline | Proc 1 |
| None (J3) | NVMe | x8 | Slimline | Proc 3 |

Standard Features

Primary 7-slot Riser (Optional) 878214-B21

| Expansion Slots (Primary/ Secondary) # | Technology | Bus/Connector Width | Form Factor/Connector | Notes |
|--|------------|---------------------|-------------------------|--------|
| 1 | PCIe 3.0 | x8 | Full length/full height | Proc 3 |
| 2 | PCIe 3.0 | x16 | Full length/full height | Proc 3 |
| 3 | PCIe 3.0 | x8 | Full length/full height | Proc 3 |
| 4 | PCIe 3.0 | x16 | Full length/full height | Proc 3 |
| 5 | PCIe 3.0 | x8 | ¾ length/full height | Proc 1 |
| 6 | PCIe 3.0 | x16 | ¾ length/full height | Proc 1 |
| 7 | PCIe 3.0 | x8 | ¾ length/full height | Proc 1 |

Secondary and Tertiary 8-slot Riser (Optional) 872338-B21

| Expansion Slots # | Technology | Bus/Connector Width | Form Factor/Connector | Notes |
|-------------------|------------|---------------------|--------------------------|--------|
| 9 | PCIe 3.0 | x16 | Full length/full height | Proc 4 |
| 10 | PCIe 3.0 | x8 | Full length/full height | Proc 4 |
| 11 | PCIe 3.0 | x16 | Full length/full height | Proc 4 |
| 12 | PCIe 3.0 | x8 | Half length/ full height | Proc 2 |
| 13 | PCIe 3.0 | x8 | Half length/ full height | Proc 2 |
| 14 | PCIe 3.0 | x8 | Half length/ full height | Proc 2 |
| 15 | PCIe 3.0 | x8 | Half length/ full height | Proc 2 |
| 16 | PCIe 3.0 | x8 | Half length/ full height | Proc 2 |
| None (J4) | NVMe | x8 | Slimline | Proc 2 |
| None (J3) | NVMe | x8 | Slimline | Proc 4 |

Secondary and Tertiary 9-slot Riser (Optional) 872340-B21

| Expansion Slots (Primary/ Secondary) # | Technology | Bus/Connector Width | Form Factor/Connector | Notes |
|--|------------|---------------------|--------------------------|--------|
| 8 | PCIe 3.0 | x8 | Full length/full height | Proc 4 |
| 9 | PCIe 3.0 | x16 | Full length/full height | Proc 4 |
| 10 | PCIe 3.0 | x8 | Full length/full height | Proc 4 |
| 11 | PCIe 3.0 | x16 | Full length/full height | Proc 4 |
| 12 | PCIe 3.0 | x8 | Half length/ full height | Proc 2 |
| 13 | PCIe 3.0 | x16 | Half length/ full height | Proc 2 |
| 14 | PCIe 3.0 | x8 | Half length/ full height | Proc 2 |
| 15 | PCIe 3.0 | x8 | Half length/ full height | Proc 2 |
| 16 | PCIe 3.0 | x8 | Half length/ full height | Proc 2 |

Primary NVMe Slimline Riser (Optional) 878360-B21 (includes the 4-port NVMe Mezzanine card)

| Expansion Slots (Primary) # | Technology | Bus/Connector Width | Form Factor/Connector | Notes |
|-----------------------------|------------|---------------------|-----------------------|--------|
| None (J4) | NVMe | x8 | Slimline | Proc 1 |
| None (J5) | NVMe | x8 | Slimline | Proc 1 |
| None (J6) | NVMe | x8 | Slimline | Proc 1 |
| None (J8) | NVMe | x8 | Slimline | Proc 1 |

4-port NVMe Mezzanine card (included with 878360-B21)

| Expansion Slots # | Technology | Bus/Connector Width | Form Factor/Connector | Notes |
|-------------------|------------|---------------------|-----------------------|--------|
| None | NVMe | x8 | Slimline | Proc 3 |
| None | NVMe | x8 | Slimline | Proc 3 |
| None | NVMe | x8 | Slimline | Proc 3 |
| None | NVMe | x8 | Slimline | Proc 3 |

Standard Features

Notes:

- A minimum of 1 primary riser needs to be ordered.
- The secondary riser is shipped with the tertiary riser and can be installed only after the primary riser has been installed. The tertiary riser cannot be ordered separately.
- Slot availability is dependent on the processor installed. Please refer the above table carefully to make decisions on adding PCIe cards.
- The expansion slots at the back are numbered in ascending order from top to bottom and from left to right.
- The optional Slimline NVMe riser (878360-B21) supports a maximum of 16 NVMe drives and includes a primary 4-port riser and a 4-port NVMe mezzanine card. The 4-port NVMe mezzanine card installs on top of the HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) or HPE DL5x0 Gen10 CPU Version 2 Mezzanine Board Kit (P07991-B21) and requires three or four processor configuration.
- Each NVMe port (slot) supports 2 NVMe drives.
- A maximum of 1 primary, 1 secondary (includes tertiary) riser can be installed in one server.
- Internal storage controllers and SAS expanders are supported only in the primary and tertiary risers. Not supported in the secondary riser.
- Primary Riser
 - Slot #1-#4: full length
 - Slot #5-#7: ¾ length
- Secondary Riser
 - Slot #8-#11: full length
 - Slot #12-#14: half length
- Tertiary Riser
 - Slot #15-#16: half length

Network Controller

The HPE ProLiant DL580 Gen10 servers offer a flexible network technology - FlexibleLOMs, which offers customers a choice of 1 Gb, 10 Gb, 25 Gb or 100Gb base-T Ethernet or converged networking in their embedded adapter. A range of NIC cards are also available to enhance networking capabilities.

Notes: For additional details see the [Networking Section of this document](#).

| BTO Model | Adapter |
|-------------------|---|
| Entry Model | HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 Adapter |
| Base Model | HPE FlexFabric 10Gb 2-port FLR-SFP+ 57810S Adapter 10GbE or HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter |
| Performance Model | HPE Ethernet 10/25Gb 2-port FLR-SFP28 MCX4121A-ACFT Adapter or HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter |

Storage Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

- Software RAID
- HPE Smart Array S100i SR Gen10 SW RAID

Notes:

- HPE Smart Array S100i SR Gen10 SW RAID will operate in UEFI mode only. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.
- HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled. For enabling, please select HPE FIO Enable Smart Array SW RAID (784308-B21).

Essential RAID

- HPE Smart Array E208i-p SR Gen10 Controller
- HPE Smart Array E208e-p SR Gen10 Controller



Standard Features

Performance RAID

- HPE Smart Array P408i-p SR Gen10 Controller
- HPE Smart Array P408e-p SR Gen10 Controller
- HPE Smart Array P824i-p MR Gen10 Controller

Internal Storage Devices

One of the following depending on model

Optical Drive

- Optional: DVD-ROM, DVD-RW

Hard Drives

- None ship standard

Hard Drive Bays

- 8 hot plug SFF SAS/SATA HDD Bay in Entry, Base and Performance Models. Optional 8 NVMe SSD Express Bay Enablement Kit
- Optional Premium 6SFF and 2 NVMe or 8SFF Bay Kit

| Maximum Internal Storage | | |
|--------------------------|----------|---------------|
| Drive | Capacity | Configuration |
| Hot Plug SFF SATA HDD | 96 TB | 48 x 2 TB |
| Hot Plug SFF SAS HDD | 115.2TB | 48 x 2.4 TB |
| Hot Plug SFF SATA SSD | 368.6 TB | 48 x 7.68 TB |
| Hot Plug SFF SAS SSD | 734 TB | 48 x 15.3 TB |
| SFF NVMe SSD | 307.2 TB | 20 x 15.36 TB |

| Interfaces | |
|---|--|
| Serial | 1 rear |
| Video | 1 front display port (optional with Universal Media Bay), 1 rear VGA |
| HPE iLO Remote Management Network Port | 1 |
| HPE iLO Front Service Port | 1 (Not available if SID is installed) |
| Micro SD Slot | 1 (Internal), 2 (optional, internal) Notes: Requires the optional HPE Dual Micro SD 8GB USB kit . |
| USB 2.0 Ports | 4 total: 2 front (optional); 2 rear |
| USB 3.0 Ports | 5 total: 2 front; 2 rear, 1 internal Notes: 2 front (optional) USB 2.0 ports need the HPE DL560 Gen10 Universal Media Bay Kit (872267-B21) . |

Recommended NVMe drive configurations

The HPE ProLiant DL580Gen10 offers a high degree of flexibility when configuring server solutions utilizing NVMe high performance SSD drives. This flexibility can make configuring the server a challenge and could result in non-optimal and partially connected NVMe configurations where not all NVMe drive bays are functional.

HPE strongly encourages customers to choose an NVMe configuration based on processor quantity and desired maximum NVMe drive needs. Configuring the server based on the recommendations presented in the table below will help guide customers to solutions optimized for NVMe drives and PCIe slot counts.



Standard Features

| Maximum NVMe Drives supported | Proc Qty | Riser Configuration | Drive Kit NVMe 8 SSD Express Bay (878362-B21) | Drive Kit Premium 6SFF and 2 NVMe (878364-B21) | Drive Kit UMB 2SFF Premium HDD (880121-B21) |
|---|----------|--|---|--|---|
| 2 | 1 | Primary 6-slot Riser (872336-B21) | 0 | 0 | 1 |
| 2 | 1 | Primary 6-slot Riser (872336-B21) | 0 | 1 | 0 |
| 2 | 2 | Primary 6-slot Riser (872336-B21) | 0 | 1 | 0 |
| 2 | 2 | Primary 6-slot Riser (872336-B21) | 0 | 0 | 1 |
| 2 | 2 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 9-slot Riser (872340-B21) | 0 | 0 | 1 |
| 2 | 2 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 9-slot Riser (872340-B21) | 0 | 1 | 0 |
| 2 | 2 | Primary 7-slot Riser (878214-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 0 | 1 |
| 2 | 2 | Primary 7-slot Riser (878214-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 1 | 0 |
| 4 | 2 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 1 | 1 |
| 4 | 2 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 2 | 0 |
| 2 | 3 | Primary 6-slot Riser (872336-B21) | 0 | 0 | 1 |
| 2 | 3 | Primary 7-slot Riser (878214-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 0 | 1 |
| 2 | 3 | Primary 7-slot Riser (878214-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 1 | 0 |
| 4 | 3 | Primary 6-slot Riser (872336-B21) | 0 | 2 | 0 |
| 4 | 3 | Primary 6-slot Riser (872336-B21) | 0 | 1 | 1 |
| 4 | 3 | Primary 6-slot Riser (872336-B21) | 1 | 0 | 0 |
| Notes: Partial configuration. Drive bays 5-8 are not functional. Add 4th processor and Secondary / Tertiary 8-slot Riser (872338-B21) to enable all 8 drive bays or change primary riser to NVMe Slimline Riser (878360-B21; includes the 4-port NVMe Mezzanine card) + Secondary and Tertiary 9-slot Riser (872340-B21) to enable 16 drive configuration. | | | | | |
| 4 | 3 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 9-slot Riser (872340-B21) | 0 | 2 | 0 |
| 4 | 3 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 9-slot Riser (872340-B21) | 0 | 1 | 1 |
| 6 | 3 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 1 | 0 | 0 |
| Notes: Partial configuration. Drive bays 7-8 are not functional. Add Processor 4 to enable all 8 drive bays. | | | | | |



Standard Features

| Maximum NVMe Drives supported | Proc Qty | Riser Configuration | Drive Kit NVMe 8 SSD Express Bay (878362-B21) | Drive Kit Premium 6SFF and 2 NVMe (878364-B21) | Drive Kit UMB 2SFF Premium HDD (880121-B21) |
|-------------------------------|----------|--|---|--|---|
| 6 | 3 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 3 | 0 |
| 6 | 3 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 2 | 1 |
| 16 | 3 | Primary NVMe Slimline Riser (878360-B21; includes the 4-port NVMe Mezzanine card) + Secondary and Tertiary 8-slot Riser (872338-B21) | 2 | 0 | 0 |
| 16 | 3 | Primary NVMe Slimline Riser (878360-B21; includes the 4-port NVMe Mezzanine card) + Secondary and Tertiary 9-slot Riser (872340-B21) | 2 | 0 | 0 |
| 18 | 3 | Primary NVMe Slimline Riser (878360-B21; includes the 4-port NVMe Mezzanine card) + Secondary and Tertiary 8-slot Riser (872338-B21) | 2 | 0 | 1 |
| 2 | 4 | Primary 6-slot Riser (872336-B21) | 0 | 0 | 1 |
| 2 | 4 | Primary 7-slot Riser (878214-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 1 | 0 |
| 2 | 4 | Primary 7-slot Riser (878214-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 0 | 1 |
| 4 | 4 | Primary 6-slot Riser (872336-B21) | 0 | 2 | |
| 4 | 4 | Primary 6-slot Riser (872336-B21) | 0 | 1 | 1 |
| 4 | 4 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 9-slot Riser (872340-B21) | 0 | 2 | |
| 4 | 4 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 9-slot Riser (872340-B21) | 0 | 1 | 1 |
| 4 | 4 | Primary 7-slot Riser (878214-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 2 | 0 |
| 4 | 4 | Primary 7-slot Riser (878214-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 1 | 1 |
| 6 | 4 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 3 | 0 |
| 8 | 4 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 1 | 0 | 0 |



Standard Features

| Maximum NVMe Drives supported | Proc Qty | Riser Configuration | Drive Kit NVMe 8 SSD Express Bay (878362-B21) | Drive Kit Premium 6SFF and 2 NVMe (878364-B21) | Drive Kit UMB 2SFF Premium HDD (880121-B21) |
|-------------------------------|----------|--|---|--|---|
| 8 | 4 | Primary 6-slot Riser (872336-B21) + Secondary and Tertiary 8-slot Riser (872338-B21) | 0 | 3 | 1 |
| 16 | 4 | Primary NVMe Slimline Riser (878360-B21; includes the 4-port NVMeMezzanine card) + Secondary and Tertiary 9-slot Riser (872340-B21) | 2 | 0 | 0 |
| 18 | 4 | Primary NVMe Slimline Riser (878360-B21; includes the 4-port NVMe Mezzanine card) + Secondary and Tertiary 8-slot Riser (872338-B21) | 2 | 0 | 1 |
| 20 | 4 | Primary NVMe Slimline Riser (878360-B21; includes the 4-port NVMe Mezzanine card) + Secondary and Tertiary 8-slot Riser (872338-B21) | 3 | 0 | 0 |

Notes:

- Partial configuration. Maximum number of NVME drives supported. 8 Drive SFF NVME in Box 1 will only support drives 1-4. Drive bays 5-8 are not functional.
- Maximum number of NVME drives supported depends on a combination of processor, box, drive bay and riser. Please refer the above table carefully before creating configurations.
- The table is a list of recommended configurations.
- The maximum drive count listed for each configuration cannot be exceeded.
- Box 1 is populated by 8 SFF SAS/SATA bay (878366-B21) and shipped as default without any drives.
- The 8 NVMe drive option (878362-B21) can only be placed in Box 1, 2 and 3. When the 8 NVMe drive option is placed in Box 1, only the first 4 NVMe (left to right) drives can be populated.
- The 6 SFF plus 2 NVMe drive option (878364-B21) can only be placed in Box 1, 2 and 3.
- The Universal Media Bay (872267-B21) is not available with the 48 SFF front end, and can only be populated in Box 4. The media bay can support 2 NVMe via the optional 2 SFF premium kit (880121-B21).
- Not all configurations supporting the UMB 2SFF are shown. Primary 6-slot Riser (872336-B21) and/or Secondary and Tertiary 8-slot Riser (872338-B21) must be selected to support this option.
- The 8 SFF can be upgraded with a multiple drive bay options with field upgrades. Please refer front diagram detail for available options. For optimal upgrade please upgrade Box 1, Box 2, Box 3, Box 4, Box 5 and Box 6 when using the 8 SFF HDD bay for a 48 SFF configuration.
- A maximum of 20 NVMe drives can be supported with 4 NVMe drives in Box 1, 8 NVMe drives in Box 2 and 8 NVMe drives in Box 3 or with 2 NVMe drives in Box 1, 8 NVMe drives in Box 2, 8 NVMe drives in Box 3 and 2 NVMe drives in Box 4 using the Universal Media Bay (872267-B21).
- All pre-configured models come with embedded software RAID support for 10 SATA drives and also include P408i-p Smart Array controller. Optional HPE Smart Array Controllers can be added.
- The 2x 4-port NVMe Slimline riser (878360-B21) comes with 2 separate 4-port NVMe risers, one which installs on the upper processor mezzanine tray. NVMe Slimline Riser option (878360-B21) cannot be used in a 2 processor configuration.



Standard Features

Power Supply

One of the following depending on model

- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

Notes:

- Available in 94% efficiency.
- Also available in -48VDC
- Must order 4x 800W Flex Slot PSU.

- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

Notes:

- Available in 94% efficiency.
- 1600W Power supplies only support high line voltage (200VAC to 240VAC).

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (416151-B21). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#)

Operating Systems and Virtualization Software Support for ProLiant Servers

With 1st generation processors Intel® Xeon® Scalable Processor Family

- [Windows Server 2012 R2](#)
- [Windows Server 2016](#)
- VMware ESXi
- [Red Hat Enterprise Linux \(RHEL\)](#)
- [SUSE Linux Enterprise Server \(SLES\)](#)

Notes: Not directly supported / Community Supported (Based on RHEL so RHEL testing and enablement applicable to Cent OS) CentOS 6.9 / CentOS 7.3.

With 2nd generation processors Intel® Xeon® Scalable Processor Family

- [Windows Server 2012 R2](#)
- [Windows Server 2016](#)
- Windows Server 2019
- VMware ESXi
- [Red Hat Enterprise Linux \(RHEL\) 7.6 and 8.0](#)
- [SUSE Linux Enterprise Server \(SLES\) 12 SP4 ,12 SP3 and 15 SP1](#)

Notes:

- Not directly supported / Community Supported (Based on RHEL so RHEL testing and enablement applicable to Cent OS) CentOS 6.9 / CentOS 7.3.
 - For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server <http://www.hpe.com/info/ossupport>.
-



Standard Features

Industry Standard Compliance

- ACPI 6.1 Compliant
- PCIe 3.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- USB 3.0 Compliant (internal); USB 2.0 Compliant
- SMBIOS 3.1
- UEFI 2.6
- Redfish API
- European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

Notes: For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <http://www.hpe.com/servers/ashrae>.

Graphics

- Integrated Video Standard
- Video modes up to 1920 x 1200@60Hz (32 bpp)
- 16MB Video Memory
- HPE iLO 5 on system management memory
- 32 MB Flash
- 4 Gbit DDR 3 with ECC protection

HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

Notes: The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload profiles for simple performance optimization

UEFI Boot Mode only:

- TPM 2.0 support
- NVMe Boot Support
- Platform Trust Technology (PTT) can be enabled
- iSCSI Software Initiator Support
- HTTP/HTTPs Boot support as a PXE alternative
- Boot support for option cards that only support a UEFI option ROM



Standard Features

Notes:

- For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.
- UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Server.

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hpe.com/info/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hpe.com/servers/uefi>.

Intelligent Provisioning

Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning. Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at <https://www.hpe.com/us/en/servers/smart-update.html>.

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities. Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.



Standard Features

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/powershell>.

HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <http://www.hpe.com/info/oneview>.

HPE Systems Insight Manager (HPE SIM)

Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <http://www.hpe.com/info/hpesim>.

Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-2 validation (iLO 5 certification in progress)
- Common Criteria certification (iLO 5 certification in progress)
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- Granular control over iLO interfaces
- Smart card (PIV/CAC) and Kerberos based 2-factor Authentication
- Tamper-free updates – components digitally signed and verified
- Secure Recovery – recover critical firmware to known good state on detection of compromised firmware
- Ability to rollback firmware
- Secure erase of NAND/User data
- TPM (Trusted Platform Module) 1.2 option
- TPM (Trusted Platform Module) 2.0 option
- Bezel Locking Kit
- Chassis Intrusion detection option

Notes:

- HPE Trusted Platform Module 2.0 Option (864279-B21) works with Gen10 servers with UEFI Mode and not Legacy Mode. The Trusted Platform Module 2.0 Option can be configured to the 1.2 version through the UEFI BIOS to support TPM 1.2 functionality.
- HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

About Trusted Platform Module

Trusted Platform Module (TPM) is a separate processor that monitors the system state. TPM is a passive component needing to be updated and not able to lock down any component in the system except access to its own memory. It also provides some cryptographic operations - among them: creating RSA key pairs, and working with them.

The first verification of signatures happens by code on the CPU, which can be intercepted and replaced. Emulating a "properly" booted system is possible by sending the right values to the TPM.

HPE supports two version of TPM, the 1.2 device and the 2.0 device. The TPM 2.0 device works with Gen10 servers that are using a Linux operating system or Microsoft Windows Server 2016. Both TPM 1.2 and 2.0 are compatible with HPE ProLiant Gen9 and Gen10 servers. These TPM modules are not compatible with server generations prior to Gen9. Once the TPM module is installed, it locks into place and cannot be removed, nor can it be replaced with a different TPM device.



Standard Features

HPE Silicon Root of Trust

The HPE Silicon Root of Trust provides protection because as soon as the server is powered on and the iLO firmware comes alive, it looks into the silicon for the immutable fingerprint that verifies all the firmware code is valid and uncompromised. Over a million lines of firmware code run, before the operating system starts, making it essential to confirm that all server essential firmware is free from malware or compromised code.

Silicon Root of Trust is included with iLO5 Standard with all platforms that contain the iLO5 chip. That includes ML, DL, Apollo, C-Class Blades, and Synergy Compute Modules. HPE Cloudline and the HPE Microserver do not have silicon root of trust, since they do not contain an iLO5 silicon chip. This technology is NOT available on any previous version of HPE ProLiant like the Gen9, Gen8, or Gen 7 servers, nor can those previous generations be retrofitted to accommodate the silicon root of trust.

The silicon validates the iLO 5 firmware code before it is fetched and executed. If any malware or compromised code has been inserted in the iLO 5 firmware, the silicon will detect that, because any infected firmware code will not match-up with the hash burned into the silicon. From there, the iLO 5 firmware validates the rest of the server firmware, namely the UEFI, CPLD, IE, and ME. The UEFI then validates the connection to the operating system, thus completing a complete root, or chain, that is anchored into the silicon.

During operation of the server, Hewlett Packard Enterprise has a new technology that conducts run-time firmware validation that checks the firmware stored in the server. At any point, if compromised code or malware is inserted in any of the critical firmware, an iLO audit log alert is created to notify the customer that a compromised has occurred.

In the unlikely event of a breach into the HPE server firmware, after detection has been completed, the customer may then securely recover the firmware automatically to a previous known good state. Hewlett Packard Enterprise provides this function through HPE iLO Advanced license.

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hp.com/us/en/enterprise/servers/warranty/>.



Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9 and Gen10 servers. To learn more visit <http://www.hpe.com/info/oneview>.

HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

GPGPU Information

- HPE NVIDIA Tesla P40 24GB Computational Accelerator
- HPE NVIDIA Tesla V100 PCIe 32GB Computational Accelerator
- HPE NVIDIA Quadro RTX 8000 GPU
- HPE NVIDIA Quadro RTX 6000 GPU

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).



Optional Features

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance

<https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>



Service and Support

HPE Pointnext - Service and Support

Get the most from your HPE Products. Get the expertise you need at every step of your IT journey with **HPE Pointnext Services**. We help you lower your risks and overall costs using automation and methodologies that have been tested and refined by HPE experts through thousands of deployments globally. HPE Pointnext **Advisory Services**, focus on your business outcomes and goals, partnering with you to design your transformation and build a roadmap tuned to your unique challenges. Our **Professional** and **Operational Services** can be leveraged to speed up time-to-production, boost performance and accelerate your business. HPE Pointnext specializes in flawless and on-time implementation, on-budget execution, and creative configurations that get the most out of software and hardware alike

Consume IT on your terms

HPE GreenLake brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake accelerates digital transformation in a distributed, edge-to-cloud world.

- Get Faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

Recommended Services

HPE Pointnext Tech Care

HPE Pointnext Tech Care is the new operational service experience for HPE products. Tech Care goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Pointnext Tech Care has been reimaged from the ground up to support a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Pointnext Tech Care is available in three response levels. Basic, which provides 9x5 business hour availability and a 2 hour response time. Essential which provides a 15 minute response time 24x7 for most enterprise level customers, and Critical which includes a 6 hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00108652enw>

HPE Datacenter Care

HPE Datacenter Care helps customers address the pressing needs of IT today and smoothly transform to a more agile cloud-like IT operations model. We help run and monitor your IT by offloading the day to day routine tasks, helping customers be more predictive and proactive, and saving time with one place to call with for all of their IT.

Partner with an assigned account team backed by local and global experts, access HPE enhanced call experience with priority access, use specialized support for complex, technologies, choose hardware and software support for your devices, implement proactive monitoring to stay ahead of issues, and access HPE IT best practices and IP. HPE Datacenter Care advantage options are available to add to your agreement to give you specialized expertise for performance, security, back up analysis, and much more. Datacenter Care is available as both tailored statement of work and as a packaged service for 3, 4, and 5 year terms.

<https://www.hpe.com/us/en/services/datacenter-hybrid-services.html>



Service and Support

Other related Services

HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://h20195.www2.hpe.com/v2/Getdocument.aspx?docname=5981-9356enw>

HPE Installation and Startup Service

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

DC for Hyperscale

Datacenter Care for Hyperscale is available for Service Providers and HPC customers who use a scale out approach to computing with a high volume homogenous infrastructure and resilient architecture can take advantage of this environment support tailored to their operating model.

HPE Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

HPE Service Credits

HPE Service Credits offers flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <http://www.hpe.com/ww/learn>



Service and Support

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>.

The HPE Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

Notes: *HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>.

Notes: HPE ProLiant DL385 Gen10 Plus Server is covered under the HPE Service Contract applied to the HPE ProLiant Server. No separate HPE support services need to be purchased.

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [here](#).

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Packard Enterprise due to malfunction.



Pre-configured Models

| Entry Models | |
|-----------------------------|---|
| SKU Number | P21273-B21 (WW) P21273-291 (JPN) P21273-AA1 (PRC) |
| Model Name | HPE ProLiant DL580 Gen10 5220 2.2GHz 18-core 2P 64GB-R P408i-p 8SFF 4x800W RPS Server |
| Processor | Intel® Xeon® 5220 (18-Core, 2.2GHz, 125W) |
| Number of Processors | 2 |
| Memory | 64 GB (2x 32GB Registered DIMMs, 2933 MT/s) Notes: 24 DIMM slots available with Entry Model; 2 more processor slots and 24 more DIMMs available via optional HPE DL5x0 Gen10 CPU Version 2 Mezzanine Board Kit (P07991-B21). |
| Network Controller | HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 Adapter |
| Storage Controller | HPE Smart Array P408i-p controller Notes: Additional Storage controllers are available as options, to enable both SAS capability as well as provide data retention with flash-backed write cache (FBWC). |
| Power Supply | 4x 800W |
| PCI-Express Slots | 3 PCIe 3.0 slots available Notes: 16 PCIe 3.0 slots available with the secondary riser and 4 processors installed. |
| Hard Drive | None ship standard |
| Internal Storage | 8 SFF Drive Bays Notes: <ul style="list-style-type: none"> – Can be expanded up to a max. of 48 SFF drives, with optional HPE DL580 Gen10 8SFF HDD Bay Kit (878366-B21). – Optionally NVMe SSD drives can be added with HPE DL580 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay Kit (878364-B21) which can be added to Box1, 2 or 3 or HPE DL580 NVMe 8 SSD Express Bay Enablement Kit (878362-B21) which can be added to Box 1 (only 4 NVMe drives), Box 2 and Box 3. – Alternatively, optional HPE DL560 Gen10 Universal Media Bay Kit (872267-B21) can be added in Box 4. |
| Optical Drive | Optional via Universal Media Bay |
| Fans | 12 hot plug fans, n+1 redundant |
| Management | HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced and HPE OneView Advanced (requires license) |
| Form Factor | Rack (4U), HPE DL580 Gen10 4U Rail Kit with CMA |
| Warranty | 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response |



Pre-configured Models

| Base Models | | |
|-----------------------------|---|--|
| SKU Number | P22709-B21 (WW) P22709-291 (JPN) P22709-AA1 (PRC) | P40458-B21 (WW) P40458-291 (JPN) P40458-AA1 (WW) |
| Model Name | HPE ProLiant DL580 Gen10 6230 2.1GHz 20-core 4P 256GB-R P408i-p 8SFF 4x1600W RPS Server | |
| Processor | Intel® Xeon® 6230 (20-Core, 2.1GHz, 125W) | |
| Number of Processors | 4 | |
| Memory | 256 GB (8x 32GB Registered DIMMs, 2933 MT/s) | |
| Network Controller | HPE FlexFabric 10Gb 2-port FLR-SFP+ 57810S Adapter | HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter |
| Storage Controller | HPE Smart Array P408i-p controller Notes: Additional Storage controllers are available as options, to enable both SAS capability as well as provide data retention with flash-backed write cache (FBWC). | |
| Power Supply | 4x 1600W Notes: 1600W Power supplies only support high line voltage (200VAC to 240VAC). | |
| PCI-Express Slots | 16 PCIe 3.0 slots available | |
| Hard Drive | None ship standard | |
| Internal Storage | 8 SFF Drive Bays Notes: <ul style="list-style-type: none"> – Can be expanded up to a max. of 48 SFF drives, with optional HPE DL580 Gen10 8SFF HDD Bay Kit (878366-B21). – Optionally NVMe SSD drives can be added with HPE DL580 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay Kit (878364-B21) which can be added to Box1, 2 or 3 or HPE DL580 NVMe 8 SSD Express Bay Enablement Kit (878362-B21) which can be added to Box 1 (only 4 NVMe drives), Box 2 and Box 3. – Alternatively, optional HPE DL560 Gen10 Universal Media Bay Kit (872267-B21) can be added in Box 4. | |
| Optical Drive | Optional via Universal Media Bay | |
| Fans | 12 hot plug fans, n+1 redundant | |
| Management | HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); | |
| Form Factor | Rack (4U), HPE DL580 Gen10 4U Rail Kit with CMA | |
| Warranty | 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response | |



Pre-configured Models

| Performance Models | | |
|-----------------------------|--|---|
| SKU Number | P05671-B21 (WW) P05671-291 (JPN) P05671-AA1 (PRC) | P40459-B21 (WW) P40459-291 (JPN) P40459-AA1 (PRC) |
| Model Name | HPE ProLiant DL580 Gen10 8260 2.4GHz 24-core 4P 512GB-R P408i-p 8SFF 4x1600W RPS Server | |
| Processor | Intel® Xeon® 8260 (24-Core, 2.4GHz, 165W) | |
| Number of Processors | 4 | |
| Memory | 512 GB (16x 32GB Registered DIMMs, 2933 MT/s) | |
| Network Controller | HPE Ethernet 10/25Gb 2-port FLR-SFP28 MCX4121A-ACFT Adapter | HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter |
| Storage Controller | HPE Smart Array P408i-p controller Notes: Additional Storage controllers are available as options, to enable both SAS capability as well as provide data retention with flash-backed write cache (FBWC). | |
| Power Supply | 4x 1600W Notes: 1600W Power supplies only support high line voltage (200VAC to 240VAC). | |
| PCI-Express Slots | 16 PCIe 3.0 slots available | |
| Hard Drive | None ship standard | |
| Internal Storage | 8 SFF Drive Bays Notes: <ul style="list-style-type: none"> – Can be expanded up to a max. of 48 SFF drives, with optional HPE DL580 Gen10 8SFF HDD Bay Kit (878366-B21). – Optionally NVMe SSD drives can be added with HPE DL580 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay Kit (878364-B21) which can be added to Box 1, 2 or 3 or HPE DL580 NVMe 8 SSD Express Bay Enablement Kit (878362-B21) which can be added to Box 1 (only 4 NVMe drives), Box 2 and Box 3. – Alternatively, optional HPE DL560 Gen10 Universal Media Bay Kit (872267-B21) can be added in Box 4. | |
| Optical Drive | Optional via Universal Media Bay | |
| Fans | 12 hot plug fans, n+1 redundant | |
| Management | HPE iLO Standard with Intelligent Provisioning (embedded), HPE OneView Standard (requires download); HPE iLO Advanced and HPE OneView Advanced | |
| Form Factor | Rack (4U), HPE DL580 Gen10 4U Rail Kit with CMA | |
| Warranty | 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response | |

Notes: European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot9 requirements. For more information regarding HPE Lot 9 conformance, please visit: <https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

Country Code Key

| | |
|-----------|------------------------------------|
| xx1 = B21 | Worldwide (excludes Japan and PRC) |
| xx1 = 291 | Japan |
| xx1 = AA1 | PRC |

Configuration Information

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information.
- European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

Step 1: Base Configuration (choose one of the following configurable models)

| | |
|------------------------------|---|
| Server description | HPE ProLiant DL580 Gen10 8SFF Configure-to-order Server |
| SKU Number | 869854-B21 |
| TAA SKU | 878213-B21 |
| Chipset | Intel® C621 Chipset |
| Processor | 4U Server Chassis with 2 processor slots available; 3 or 4 processors configuration would require optional oLiant HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) HPE DL5x0 Gen10 CPU Version 2 Mezzanine Board Kit (P07991-B21) |
| DIMM Slots | 24 DIMM slots for RDIMM, LRDIMM DDR4 Memory; (6 DIMM slots per processor can be used for NVDIMMs or can be used for HPE Persistent Memory) 48 DIMM configuration would require optional HPE ProLiant HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) and 4 processors Notes: If 2nd generation Intel® Xeon® Scalable processors are being used (82xx, 62xx or 52xx series) the 48 DIMM configuration would require optional HPE DL5x0 Gen10 CPU Version 2 Mezzanine Board Kit (P07991-B21) |
| Network Controller | None. FlexibleLOM slot (various options can be chosen for networking; NIC cards also available via expansion slots) |
| Storage Controller | HPE Smart Array S100i Notes: HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled. For enabling, please select HPE FIO Enable Smart Array SW RAID (784308-B21). |
| PCIe | None. Must order a primary riser (16 PCIe 3.0 slots are available if all processors are chosen and the primary, secondary and tertiary Riser Kits have been installed) |
| Drive Cage - included | 8 SFF in Box 1, no drives |
| Fans | 12 hot plug fans, (n+1) redundant |
| Management | HPE iLO Standard with Intelligent Provisioning and (Standard); HPE OneView Standard (requires download) and HPE iLO Advanced (require additional licenses), HPE OneView Advanced (require additional licenses) |
| microSD Slots | 1 microSD card slot (internal) |
| TPM Connector | 1 Trusted Platform Module (TPM) connector |
| UEFI | BIOS Legacy mode (field configurable) or Unified Extensible Firmware Interface (UEFI) mode (default) |
| USB | 7 USB ports (2 USB 2.0 and 5 USB 3.0), Optional 2 front available via universal media kit upgrade |
| Video Ports | 2 video ports (1 front optional via the Universal Media Kit upgrade option, 1 rear) |
| Rails | HPE DL580 Gen10 4U Rail Kit with CMA |

Configuration Information

Notes:

- Trade Agreement Act (TAA) and means that these SKUs are manufactured in countries that are part of the global trade act. This provides greater security assurance that these servers come from countries that signed the agreement act. This is particularly important to HPE customers in our federal sector and other verticals that have concerns about the country of origin for our solutions.
- TAA chassis are only orderable in North America and Canada.
- PCIe slot availability is dependent on the number of processors and riser kits installed. Please refer to the "Expansion slots" section for more details.
- For four processors, the HPE DL5x0 Gen10 CPU Version 2 Mezzanine Board Kit (P07991-B21) is required if 2nd generation Intel® Xeon® Scalable processors are being used.
- This applies to CTO configurations, field upgrades may differ depending on field configuration.
- For more information about riser configuration, please visit:
<https://h20195.www2.hp.com/v2/Getdocument.aspx?docname=a00043229enw>
- DL500 family is identified as Resilient Server category under LOT 9 regulation, system minimum configuration with 2 Memory DIMMs and 2 PSUs for CE Market.

Step 2: Choose Required Options

Please select one –L21 processor required below.

Step 2a: Choose Processor Options

Processor Option Kits

| Description | SKU |
|--|------------|
| Intel Xeon-Platinum 8280L (2.7GHz/28-core/205W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P05713-L21 |
| Intel Xeon-Platinum 8280 (2.7GHz/28-core/205W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P05716-L21 |
| Intel Xeon-Platinum 8276L (2.2GHz/28-core/165W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P05722-L21 |
| Intel Xeon-Platinum 8276 (2.2GHz/28-core/165W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P05714-L21 |
| Intel Xeon-Platinum 8270 (2.7GHz/26-core/205W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P05712-L21 |
| Intel Xeon-Platinum 8268 (2.9GHz/24-core/205W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P05711-L21 |
| Intel Xeon-Platinum 8260L (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P05707-L21 |
| Intel Xeon-Platinum 8260 (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P05708-L21 |
| Intel Xeon-Platinum 8260Y (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P05691-L21 |
| Intel Xeon-Platinum 8256 (3.8GHz/4-core/105W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P05706-L21 |
| Intel Xeon-Platinum 8253 (2.2GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05705-L21 |
| Intel Xeon-Gold 6256 (3.6GHz/12-core/205W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P24436-L21 |
| Intel Xeon-Gold 6254 (3.1GHz/18-core/200W) FIO Processor Kit for HPE ProLiant DL580 Gen10 Notes: Ships with Performance Heatsink. | P05704-L21 |

Configuration Information

| | |
|---|------------|
| Intel Xeon-Gold 6252 (2.1GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05703-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6252N (2.3GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05720-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6248 (2.5GHz/20-core/150W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05701-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6246 (3.3GHz/12-core/165W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P15748-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6244 (3.6GHz/8-core/150W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05699-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6242 (2.8GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05696-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6240L (2.6GHz/18-core/150W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05697-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6240 (2.6GHz/18-core/150W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05694-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6240Y (2.6GHz/18-14-8-core/150W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05690-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6238L (2.1GHz/22-core/140W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P11964-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6238 (2.1GHz/22-core/140W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05702-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6234 (3.3GHz/8-core/130W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05700-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6230 (2.1GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05688-L21 |
| Intel Xeon-Gold 6230N (2.3GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05710-L21 |
| Intel Xeon-Gold 6262V (1.9GHz/24-core/135W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05686-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6222V (1.8GHz/20-core/115W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05689-L21 |
| Intel Xeon-Gold 6226 (2.7GHz/12-core/125W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05693-L21 |
| Intel Xeon-Gold 5222 (3.8GHz/4-core/105W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05692-L21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 5220 (2.2GHz/18-core/125W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05684-L21 |
| Intel Xeon-Gold 5220S (2.7GHz/18-core/125W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P11856-L21 |
| Intel Xeon-Gold 5218 (2.3GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05683-L21 |
| Intel Xeon-Gold 5218B (2.3GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P12534-L21 |
| Intel Xeon-Gold 5218N (2.3GHz/16-core/110W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05698-L21 |
| Intel Xeon-Gold 5217 (3.0GHz/8-core/115W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05719-L21 |
| Intel Xeon-Gold 5215L (2.5GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05687-L21 |
| Intel Xeon-Gold 5215 (2.5GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL580 Gen10 | P05682-L21 |

Notes:

- If more than one processor is desired select one xxxxxx-L21 and one, two or three corresponding xxxxxx-B21 processors. Mixing different processor models is not supported.
- Mixing of 1st and 2nd generation Intel® Xeon® Scalable processors – (8/6/5)1xx and (8/6/5)2xx models - is not supported.



Configuration Information

Step 2b: Choose Memory Options (at least one Memory Kit is required)

Only one of the following from each list unless otherwise noted

Memory Options

Registered DIMMs (RDIMMs)

| | |
|---|------------|
| HPE 8GB (1x8GB) Single Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00918-B21 |
| HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 815097-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00920-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 815098-B21 |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00922-B21 |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 835955-B21 |
| HPE 32GB (1x32GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Memory Kit | P38446-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00924-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 815100-B21 |
| HPE 64GB (1x64GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00930-B21 |

Load Reduced DIMMs (LRDIMMs)

| | |
|--|------------|
| HPE 64GB (1x64GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit | P00926-B21 |
| HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit | 815101-B21 |
| HPE 128GB (1x128GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit | P11040-B21 |
| HPE 128GB (1x128GB) Octal Rank x4 DDR4-2933 CAS-24-21-21 Load Reduced 3DS Smart Memory Kit | P00928-B21 |
| HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Memory Kit | 815102-B21 |

HPE Persistent Memory

| | |
|---|------------|
| Intel Optane 128GB persistent memory 100 Series for HPE | 835804-B21 |
| Intel Optane 256GB persistent memory 100 Series for HPE | 835807-B21 |
| Intel Optane 512GB persistent memory 100 Series for HPE | 835810-B21 |

Notes:

- LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.
- The 2933 MT/s memory DIMMs are supported with the 2nd generation Intel® Xeon® Scalable processors (82xx,62xx and 52xx)
- The 2666 MT/s memory DIMMs are supported with the 1st generation Intel® Xeon® Scalable processors (81xx,61xx and 51xx).
- The HPE Persistent Memory kits are only supported with the 2nd generation Intel® Xeon® Scalable processors
- The HPE Persistent Memory kits are required to support up to 2 TB on 'M' processors and up to 4.5TB on 'L' processors
- The HPE Persistent Memory kits cannot be selected with NVDIMMs or with any single rank x8 DDR4 2933 memory kit
- The HPE Persistent Memory cannot be supported in a 3P configuration
- HPE Persistent Memory kits of different capacities cannot be mixed within a server
- For General Server Memory , HPE Persistent Memory and NVDIMM Population Rules and Guidelines for Gen10 see details here: <http://www.hpe.com/docs/memory-population-rules>

Step 2c: Choose Power Supplies (at least one Power Supply Kit is required)

Only one or more of the following from each list unless otherwise noted

Power Supplies

| | |
|--|------------|
| HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 865414-B21 |
| HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit | 865434-B21 |
| HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 830272-B21 |

Notes:

- Select one or more power supplies. For 800W, 4 power supplies need to be selected.
- 1600W Power supplies only support high line voltage (200VAC to 240VAC).



Configuration Information

- The -48VDC power supply cannot be selected with the HPE Persistent Memory kits
- Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hpe.com/info/hppoweradvisor>.
- All power supplies in a server should match. Mixing Power Supplies is not supported.
- HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional power cords.
- DL500 family is identified as Resilient Server category under LOT 9 regulation, system minimum configuration with 2 Memory DIMMs and 2 PSUs for CE Market.

Step 2d: Choose network adapters (at least one adapter is required)

Only one of the following from each list unless otherwise noted

Network adapters

| | |
|---|------------|
| HPE Ethernet 1Gb 4-port FLR-T BCM5719 Adapter | 629135-B22 |
| HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 Adapter | 665240-B21 |
| HPE FlexFabric 10Gb 2-port FLR-T 57810S Adapter | 700759-B21 |
| HPE FlexFabric 10Gb 2-port FLR-SFP+ 57810S Adapter | 700751-B21 |
| HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter | 817721-B21 |
| HPE FlexFabric 10Gb 4-port FLR-T 57840S Adapter | 764302-B21 |
| HPE Ethernet 10Gb 2-port FLR-SFP+ X710-DA2 Adapter | 727054-B21 |
| HPE Ethernet 10Gb 2-port FLR-T X550-AT2 Adapter | 817745-B21 |
| HPE Ethernet 10/25Gb 2-port FLR-SFP28 QL41401-A2G Converged Network Adapter | 867334-B21 |
| HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter | 817709-B21 |
| HPE Ethernet 10/25Gb 2-port FLR-SFP28 MCX4121A-ACFT Adapter | 817749-B21 |

Step 3: Choose Additional Factory Integratable Options

Only one of the following from each list unless otherwise noted

| | |
|-------------------------------|------------|
| HPE Gen10 TPM 1.2 FIO Setting | 872108-B21 |
|-------------------------------|------------|

Notes: TPM 2.0 is set as default, for 1.2 TPM setting instead, please select this option.

HPE OneView

| | |
|--|--------|
| HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU | P8B31A |
| HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU | E5Y43A |

BIOS Mode

| | |
|-----------------------------|------------|
| HPE Legacy FIO Mode Setting | 758959-B22 |
|-----------------------------|------------|

Notes: Selecting this option will change the UEFI BIOS setting into Legacy BIOS Setting.

Controller State

| | |
|------------------------------------|------------|
| HPE FIO Enable Smart Array SW RAID | 784308-B21 |
|------------------------------------|------------|

Notes: If not selecting an HPE Storage Controller, this option may be selected to support RAID and Hot-plug capabilities for SATA hard drives. The S100i does not support SAS hard drives.

Step 4: Choose Additional Options for Factory Integration from Core and additional Options sections below



Core Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Unique Options

| | |
|---|------------|
| HPE DL580 Gen10 12Gb 24-port SAS Expander Card Kit with Cables | 881101-B21 |
| HPE DL560 Gen10 Universal Media Bay Kit | 872267-B21 |
| HPE DL580 NVMe 8 SSD Express Bay Enablement Kit | 878362-B21 |
| HPE DL580 Gen10 Premium 6SFF and 2 NVMe or 8SFF Bay Kit | 878364-B21 |
| HPE DL580 Gen10 8SFF HDD Bay Kit | 878366-B21 |
| HPE DL580 Gen10 2SFF Premium HDD Front NVMe/SAS/SATA Kit | 880121-B21 |
| HPE DL5x0 Gen10 System Insight Display Kit | 872261-B21 |
| HPE DL5x0 Gen10 CPU Version 2 Mezzanine Board Kit | P07991-B21 |
| Notes: The HPE DL5x0 Gen10 CPU Version 2 Mezzanine Board Kit (P07991-B21) is needed for three or four processor configurations using 1 st and 2 nd generation Intel® Xeon® Scalable processors (all listed in this Quick spec. document) | |
| HPE DL5x0 Gen10 CPU Mezzanine UPI Performance Kit | 875608-B21 |
| Notes: The HPE DL5x0 Gen10 CPU Mezzanine UPI Performance Kit can only be used in 2 processor configurations | |
| HPE DL580 Gen10 4U Rail Kit with Cable Management Arm | 872151-B21 |
| HPE DL580 Gen10 6-slot 4 x8/2 x16 2-port 4 NVMe Slimline Primary Riser Kit | 872336-B21 |
| Notes: This kit supports 6 PCIe slots and 2 NVMe ports which can support up to 4 NVMe drives. | |
| HPE DL580 Gen10 8-slot 6 x8/2 x16 2-port 4 NVMe Slimline Secondary Riser Kit | 872338-B21 |
| Notes: This kit supports 8 PCIe slots and 2 NVMe ports which can support up to 4 NVMe drives. | |
| HPE DL580 Gen10 7-slot 4 x8/3 x16 Primary Riser Kit | 878214-B21 |
| HPE DL580 Gen10 2x 4-port 16 NVMe Slimline Riser Kit | 878360-B21 |
| Notes: This kit occupies the primary riser slot, supports 16 NVMe drives and must be ordered when supporting greater than 8 NVMe drives. | |
| HPE DL38x Gen10 8-pin Keyed Cable Kit | 871829-B21 |
| Notes: | |
| – Must be ordered if P40/ V100 is selected. If more than 3 GPUs are selected ,then 2 Quantity of cable kit is required. | |
| – The HPE DL580 Gen10 8SFF HDD Bay Kit (878366-B21) is shipped default with the server. | |
| – A minimum of 1 primary riser must be ordered. | |
| HPE DL38X/560/580/ML350 Gen10 P824i-p Cable Kit | P00614-B21 |
| Notes: Needs to be ordered with the SmartArray P824i-p MR Gen10 controller. | |
| HPE DL580 Gen10 9-slot 6 x8/3 x16 Secondary Riser Kit | 872340-B21 |
| HPE DL580 Gen10 GPU Bracket Kit | P00268-B21 |
| Notes: HPE DL580 Gen10 GPU Bracket Kit (P00268-B21) kit is needed to install GPUs in slots 4 and 11 and must be ordered along with the GPU cable kits 871829-B21 (for P40). Refer Expansion Slots sections for additional details on risers. | |

Core Options

HPE Processors

| | |
|--|------------|
| Intel Xeon-Platinum 8280L (2.7GHz/28-core/205W) Processor Kit for HPE ProLiant DL580 Gen10 | P05713-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Platinum 8280 (2.7GHz/28-core/205W) Processor Kit for HPE ProLiant DL580 Gen10 | P05716-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Platinum 8276L (2.2GHz/28-core/165W) Processor Kit for HPE ProLiant DL580 Gen10 | P05722-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Platinum 8276 (2.2GHz/28-core/165W) Processor Kit for HPE ProLiant DL580 Gen10 | P05714-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Platinum 8270 (2.7GHz/26-core/205W) Processor Kit for HPE ProLiant DL580 Gen10 | P05712-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Platinum 8268 (2.9GHz/24-core/205W) Processor Kit for HPE ProLiant DL580 Gen10 | P05711-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Platinum 8260L (2.4GHz/24-core/165W) Processor Kit for HPE ProLiant DL580 Gen10 | P05707-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Platinum 8260 (2.4GHz/24-core/165W) Processor Kit for HPE ProLiant DL580 Gen10 | P05708-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Platinum 8260Y (2.4GHz/24-20-16-core/165W) Processor Kit for HPE ProLiant DL580 Gen10 | P05691-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Platinum 8256 (3.8GHz/4-core/105W) Processor Kit for HPE ProLiant DL580 Gen10 | P05706-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Platinum 8253 (2.2GHz/16-core/125W) Processor Kit for HPE ProLiant DL580 Gen10 | P05705-B21 |
| Intel Xeon-Gold 6256 (3.6GHz/12-core/205W) Processor Kit for HPE ProLiant DL580 Gen10 | P24436-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6254 (3.1GHz/18-core/200W) Processor Kit for HPE ProLiant DL580 Gen10 | P05704-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6252 (2.1GHz/24-core/150W) Processor Kit for HPE ProLiant DL580 Gen10 | P05703-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6252N (2.3GHz/24-core/150W) Processor Kit for HPE ProLiant DL580 Gen10 | P05720-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6248 (2.5GHz/20-core/150W) Processor Kit for HPE ProLiant DL580 Gen10 | P05701-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6246 (3.3GHz/12-core/165W) Processor Kit for HPE ProLiant DL580 Gen10 | P15748-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6244 (3.6GHz/8-core/150W) Processor Kit for HPE ProLiant DL580 Gen10 | P05699-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6242 (2.8GHz/16-core/150W) Processor Kit for HPE ProLiant DL580 Gen10 | P05696-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6240L (2.6GHz/18-core/150W) Processor Kit for HPE ProLiant DL580 Gen10 | P05697-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6240 (2.6GHz/18-core/150W) Processor Kit for HPE ProLiant DL580 Gen10 | P05694-B21 |
| Notes: Ships with Performance Heatsink. | |



Core Options

| | |
|---|------------|
| Intel Xeon-Gold 6240Y (2.6GHz/18-14-8-core/150W) Processor Kit for HPE ProLiant DL580 Gen10 | P05690-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6238L (2.1GHz/22-core/140W) Processor Kit for HPE ProLiant DL580 Gen10 | P11964-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6238 (2.1GHz/22-core/140W) Processor Kit for HPE ProLiant DL580 Gen10 | P05702-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6234 (3.3GHz/8-core/130W) Processor Kit for HPE ProLiant DL580 Gen10 | P05700-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6230 (2.1GHz/20-core/125W) Processor Kit for HPE ProLiant DL580 Gen10 | P05688-B21 |
| Intel Xeon-Gold 6230N (2.3GHz/20-core/125W) Processor Kit for HPE ProLiant DL580 Gen10 | P05710-B21 |
| Intel Xeon-Gold 6262V (1.9GHz/24-core/135W) Processor Kit for HPE ProLiant DL580 Gen10 | P05686-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 6222V (1.8GHz/20-core/115W) Processor Kit for HPE ProLiant DL580 Gen10 | P05689-B21 |
| Intel Xeon-Gold 6226 (2.7GHz/12-core/125W) Processor Kit for HPE ProLiant DL580 Gen10 | P05693-B21 |
| Intel Xeon-Gold 5222 (3.8GHz/4-core/105W) Processor Kit for HPE ProLiant DL580 Gen10 | P05692-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Gold 5220 (2.2GHz/18-core/125W) Processor Kit for HPE ProLiant DL580 Gen10 | P05684-B21 |
| Intel Xeon-Gold 5220S (2.7GHz/18-core/125W) Processor Kit for HPE ProLiant DL580 Gen10 | P11856-B21 |
| Intel Xeon-Gold 5218 (2.3GHz/16-core/125W) Processor Kit for HPE ProLiant DL580 Gen10 | P05683-B21 |
| Intel Xeon-Gold 5218B (2.3GHz/16-core/125W) Processor Kit for HPE ProLiant DL580 Gen10 | P12534-B21 |
| Intel Xeon-Gold 5218N (2.3GHz/16-core/110W) Processor Kit for HPE ProLiant DL580 Gen10 | P05698-B21 |
| Intel Xeon-Gold 5217 (3.0GHz/8-core/115W) Processor Kit for HPE ProLiant DL580 Gen10 | P05719-B21 |
| Intel Xeon-Gold 5215L (2.5GHz/10-core/85W) Processor Kit for HPE ProLiant DL580 Gen10 | P05687-B21 |
| Intel Xeon-Gold 5215 (2.5GHz/10-core/85W) Processor Kit for HPE ProLiant DL580 Gen10 | P05682-B21 |

Notes:

- If more than one processor is desired select one xxxxxx-L21 and one, two or three corresponding xxxxxx-B21 processors. Mixing different processor models is not supported.
- Mixing of 1st and 2nd generation Intel® Xeon® Scalable processors – (8/6/5)1xx and (8/6/5)2xx models -is not supported

Memory Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, Hewlett Packard Enterprise recommends memory from the list located here: <http://www.hpe.com/products/recommend>. Best product availability is limited to US, Canada, and Latin America at this time.

HPE Memory

Hewlett Packard Enterprise memory from previous generation servers is not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen10. For additional information, please see the [HPE SmartMemory QuickSpecs](#). LRDIMM and RDIMM are all distinct memory technologies and cannot be mixed within a server.

Registered DIMMs (RDIMMs)

| | |
|---|------------|
| HPE 8GB (1x8GB) Single Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00918-B21 |
| HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 815097-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00920-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 815098-B21 |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00922-B21 |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 835955-B21 |

Core Options

| | |
|---|------------|
| HPE 32GB (1x32GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Memory Kit | P38446-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00924-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 815100-B21 |
| HPE 64GB (1x64GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00930-B21 |

Load Reduced DIMMs (LRDIMMs)

| | |
|--|------------|
| HPE 64GB (1x64GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit | P00926-B21 |
| HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit | 815101-B21 |
| HPE 128GB (1x128GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit | P11040-B21 |
| HPE 128GB (1x128GB) Octal Rank x4 DDR4-2933 CAS-24-21-21 Load Reduced 3DS Smart Memory Kit | P00928-B21 |
| HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Memory Kit | 815102-B21 |

Notes:

- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.
- The 2666 MT/s DIMMs are only supported with the 1st generation Intel® Xeon® Scalable processors (81xx,61xx and 51xx)
- The 2933MT/s DIMMs are only supported with the 2nd generation Intel® Xeon® Scalable processors (82xx,62xx and 52xx).

HPE Persistent Memory

| | |
|---|------------|
| Intel Optane 128GB persistent memory 100 Series for HPE | 835804-B21 |
| Intel Optane 256GB persistent memory 100 Series for HPE | 835807-B21 |
| Intel Optane 512GB persistent memory 100 Series for HPE | 835810-B21 |

Notes:

- A maximum of 6 HPE Persistent Memory kits per processor and a maximum of 24 kits are supported
- The HPE Persistent Memory kits are only supported with the 2nd generation Intel® Xeon® Scalable processors
- The HPE Persistent Memory kits are required to support up to 2 TB on 'M' processors and up to 4.5TB on 'L' processors
- The HPE Persistent Memory kits cannot be selected with NVDIMMs or with any single rank x8 DDR4 2933 memory kit
- HPE Persistent Memory cannot be supported in a 3P configuration
- Persistent Memory kits of different capacities cannot be mixed within a server

| Configuration | HPE Persistent Memory kits | Number of RDIMMs or LRDIMMs required |
|---------------|----------------------------|--------------------------------------|
| 1P | 1 | 6 |
| | 2 | 4,6 or 8 |
| | 4 | 6 |
| | 6 | 6 |
| 2P | 2 | 12 |
| | 4 | 8, 12 or 16 |
| | 8 | 12 |
| | 12 | 12 |
| 4P | 4 | 24 |
| | 8 | 16,24 or 32 |
| | 16 | 24 |
| | 24 | 24 |

Notes: Please refer to <http://www.hpe.com/info/persistentmemory> for HPE Persistent Memory population rules and guidelines.

HPE Persistent Memory

| | |
|---|------------|
| HPE 16GB NVDIMM Single Rank x4 DDR4-2666 Module Kit | 845264-B21 |
|---|------------|

Notes:

- A maximum of 6 NVDIMMs are supported per processor and the DL560 can support a maximum of 24 NVDIMMs.
- NVDIMMs are only supported on 1st generation processors



Core Options

- Please refer to <http://www.hpe.com/info/persistentmemory> for NVDIMM population rules and guidelines.

HPE Optical Drives

HPE 9.5mm SATA DVD-ROM Optical Drive 726536-B21

Notes: The optional Universal Media Bay Kits are required for this option. (HPE ProLiant DL560 Gen10 Universal Media Bay kit 872267-B21).

HPE 9.5mm SATA DVD-RW Optical Drive 726537-B21

Notes: The optional Universal Media Bay Kits are required for this option. (HPE ProLiant DL560 Gen10 Universal Media Bay kit 872267-B21).

HPE Mobile USB DVD-RW Optical Drive 701498-B21

Notes: External

HPE Drives

Notes:

- The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.
- Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Enterprise – 12G SAS – SFF Drives

HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 870753-B21

HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 872475-B21

HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 870757-B21

HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 872477-B21

HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 870759-B21

HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD 872479-B21

HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD 872481-B21

HPE 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD 881457-B21

Midline – 12G SAS – SFF Drives

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD 832514-B21

HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD 765466-B21

SSD Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, Hewlett Packard Enterprise recommends SSDs from the list located here: <http://www.hpe.com/products/recommend>.

Write Intensive - SAS - SFF - Solid State Drives

HPE 400GB SAS 12G Write Intensive SFF SC SS540 SSD P21125-B21

HPE 400GB SAS 12G Write Intensive SFF SC PM5 SSD P04541-B21

HPE 800GB SAS 12G Write Intensive SFF SC SS540 SSD P21127-B21

HPE 800GB SAS 12G Write Intensive SFF SC PM5 SSD P04543-B21

HPE 1.6TB SAS 12G Write Intensive SFF SC SS540 SSD P21129-B21

HPE 1.6TB SAS 12G Write Intensive SFF SC PM5 SSD P04545-B21

HPE 400GB SAS 24G Write Intensive SFF SC PM6 SSD P26295-B21

HPE 800GB SAS 24G Write Intensive SFF SC PM6 SSD P26372-B21

HPE 1.6TB SAS 24G Write Intensive SFF SC PM6 SSD P26376-B21



Core Options

Write Intensive - SAS - SFF - Solid State Drives

HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD P09102-B21

Read Intensive – SAS – SFF – Solid State Drives

HPE 960GB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD P36997-B21

HPE 960GB SAS 12G Read Intensive SFF SC SS540 SSD P21139-B21

HPE 960GB SAS 12G Read Intensive SFF SC Value SAS RM5 SSD P10440-B21

HPE 960GB SAS 12G Read Intensive SFF SC PM5 SSD P04517-B21

HPE 960GB SAS 12G Read Intensive SFF SC PM1643a SSD P19903-B21

HPE 1.92TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD P36999-B21

HPE 1.92TB SAS 12G Read Intensive SFF SC SS540 SSD P21141-B21

HPE 1.92TB SAS 12G Read Intensive SFF SC Value SAS RM5 SSD P10442-B21

HPE 1.92TB SAS 12G Read Intensive SFF SC PM5 SSD P04519-B21

HPE 1.92TB SAS 12G Read Intensive SFF SC PM1643a SSD P19905-B21

HPE 3.84TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD P37001-B21

HPE 3.84TB SAS 12G Read Intensive SFF SC SS540 SSD P21143-B21

HPE 3.84TB SAS 12G Read Intensive SFF SC Value SAS RM5 SSD P10444-B21

HPE 3.84TB SAS 12G Read Intensive SFF SC PM5 SSD P04521-B21

HPE 3.84TB SAS 12G Read Intensive SFF SC PM1643a SSD P19907-B21

HPE 7.68TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD P37003-B21

HPE 7.68TB SAS 12G Read Intensive SFF SC SS540 SSD P21145-B21

HPE 7.68TB SAS 12G Read Intensive SFF SC Value SAS RM5 SSD P10446-B21

HPE 7.68TB SAS 12G Read Intensive SFF SC PM5 SSD P04523-B21

HPE 7.68TB SAS 12G Read Intensive SFF SC PM1643a SSD P19909-B21

HPE 15.3TB SAS 12G Read Intensive SFF SC SS540 SSD P21147-B21

HPE 15.36TB SAS 12G Read Intensive SFF SC PM1643a SSD P19911-B21

HPE 960GB SAS 24G Read Intensive SFF SC PM6 SSD P26285-B21

HPE 1.92TB SAS 24G Read Intensive SFF SC PM6 SSD P26302-B21

HPE 3.84TB SAS 24G Read Intensive SFF SC PM6 SSD P26306-B21

HPE 7.68TB SAS 24G Read Intensive SFF SC PM6 SSD P26310-B21

HPE 15.3TB SAS 24G Read Intensive SFF SC PM6 SSD P26314-B21

Read Intensive – SATA – SFF – Solid State Drives

HPE 240GB SATA 6G Read Intensive SFF SC Multi Vendor SSD P18420-B21

HPE 240GB SATA 6G Read Intensive SFF SC S4510 SSD P05924-B21

HPE 240GB SATA 6G Read Intensive SFF SC PM883 SSD P04556-B21

HPE 240GB SATA 6G Read Intensive SFF SC 5300P SSD P19935-B21

HPE 480GB SATA 6G Read Intensive SFF SC Multi Vendor SSD P18422-B21

HPE 480GB SATA 6G Read Intensive SFF SC S4510 SSD P05928-B21

HPE 480GB SATA 6G Read Intensive SFF SC PM883 SSD P04560-B21

HPE 480GB SATA 6G Read Intensive SFF SC SE4011 SSD P06194-B21

HPE 480GB SATA 6G Read Intensive SFF SC 5300P SSD P19937-B21

HPE 960GB SATA 6G Read Intensive SFF SC Multi Vendor SSD P18424-B21

HPE 960GB SATA 6G Read Intensive SFF SC S4510 SSD P05932-B21

HPE 960GB SATA 6G Read Intensive SFF SC SE4011 SSD P06196-B21

HPE 960GB SATA 6G Read Intensive SFF SC PM883 SSD P04564-B21



Core Options

| | |
|---|------------|
| HPE 960GB SATA 6G Read Intensive SFF SC 5300P SSD | P19939-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF SC Multi Vendor SSD | P18426-B21 |
| Read Intensive – SATA – SFF – Solid State Drives | |
| HPE 1.92TB SATA 6G Read Intensive SFF SC S4510 SSD | P05938-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF SC SE4011 SSD | P06198-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF SC PM883 SSD | P04566-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF SC 5300P SSD | P19941-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF SC Multi Vendor SSD | P18428-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF SC S4510 SSD | P05946-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF SC SE4011 SSD | P06200-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF SC PM883 SSD | P04570-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF SC 5300P SSD | P19943-B21 |
| HPE 7.68TB SATA 6G Read Intensive SFF SC Multi Vendor SSD | P18430-B21 |
| HPE 7.68TB SATA 6G Read Intensive SFF SC 5300P SSD | P19945-B21 |
| Very Read Optimized –SATA -SFF- Solid State Drives | |
| HPE 960GB SATA 6G Mixed Use SFF SC 5300M SSD | P19949-B21 |
| HPE 1.92TB SATA 6G Very Read Optimized SFF SC 5210 SSD | P23487-B21 |
| HPE 3.84TB SATA 6G Very Read Optimized SFF SC 5210 SSD | P23489-B21 |
| HPE 7.68TB SATA 6G Very Read Optimized SFF SC 5210 SSD | P23493-B21 |
| Read Intensive - NVMe - SFF - Solid State Drives | |
| HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10210-B21 |
| Read Intensive - NVMe - SFF - Solid State Drives | |
| HPE 960GB NVMe Gen3 Mainstream Performance Read Intensive SFF SCN U.2 PE6011 SSD | P13676-B21 |
| HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07192-B21 |
| HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10214-B21 |
| HPE 1.92TB NVMe Gen3 Mainstream Performance Read Intensive SFF SCN U.2 PE6011 SSD | P13678-B21 |
| HPE 2TB NVMe Gen3 High Performance Read Intensive SFF SCN U.2 P4510 SSD | P13695-B21 |
| HPE 3.84TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10212-B21 |
| HPE 3.84TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07194-B21 |
| HPE 3.84TB NVMe Gen3 Mainstream Performance Read Intensive SFF SCN U.2 PE6011 SSD | P13680-B21 |
| HPE 4TB NVMe Gen3 High Performance Read Intensive SFF SCN U.2 P4510 SSD | P13697-B21 |
| HPE 7.68TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07196-B21 |
| HPE 15.36TB NVMe Gen3 High Performance Read Intensive SFF SCN U.2 CM5 SSD | P07198-B21 |
| Performance Read Intensive- NVMe -SFF- U.3 - Solid State Drives | |
| HPE 960GB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 CM6 SSD | P20015-B21 |
| HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 CM6 SSD | P20017-B21 |
| HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 CM6 SSD | P20019-B21 |
| Read Intensive- NVMe -SFF- U.3 - Solid State Drives | |
| HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 PE8010 SSD | P19809-B21 |
| HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 PE8010 SSD | P19813-B21 |
| HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 PE8010 SSD | P19817-B21 |
| HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 PE8010 SSD | P19821-B21 |
| HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 CD6 SSD | P25944-B21 |
| HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 CD6 SSD | P20139-B21 |



Core Options

HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 CD6 SSD P20141-B21

HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.3 CD6 SSD P20143-B21

Write Intensive - NVMe - SFF - Solid State Drives

HPE 375GB NVMe Gen3 High Performance Low Latency Write Intensive SFF SCN U.2 P4800X SSD 878014-B21

HPE 750GB NVMe Gen3 High Performance Low Latency Write Intensive SFF SCN U.2 P4800X SSD P06952-B21

Notes:

- An NVMe (878366-B21) or Premium (878364-B21) drive cage are required to support these drives in conjunction with an NVMe riser. Consult Pages 11-13 for recommended NVMe server configurations.
- NVMe drives are not supported by HPE Smart Array controllers.

Read Intensive – M.2 – Solid State Drives

HPE 240GB SATA 6G Read Intensive M.2 2280 5300B SSD P19888-B21

HPE 480GB SATA 6G Read Intensive M.2 2280 5300P SSD P19890-B21

HPE 960GB SATA 6G Read Intensive M.2 2280 5300P SSD P19892-B21

Mixed Use – SAS – SFF – Solid State Drives

HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD P04525-B21

HPE 800GB SAS 12G Mixed Use SFF SC SS540 SSD P21131-B21

HPE 800GB SAS 12G Mixed Use SFF SC PM5 SSD P04527-B21

HPE 800GB SAS 12G Mixed Use SFF SC PM1645a SSD P19913-B21

HPE 960GB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD P37005-B21

HPE 960GB SAS 12G Mixed Use SFF SC Value SAS RM5 SSD P10448-B21

HPE 1.6TB SAS 12G Mixed Use SFF SC SS540 SSD P21133-B21

HPE 1.6TB SAS 12G Mixed Use SFF SC PM5 SSD P04533-B21

HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD P09092-B21

HPE 1.6TB SAS 12G Mixed Use SFF SC PM1645a SSD P19915-B21

HPE 1.92TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD P37011-B21

HPE 1.92TB SAS 12G Mixed Use SFF SC Value SAS RM5 SSD P10454-B21

HPE 3.2TB SAS 12G Mixed Use SFF SC SS540 SSD P21135-B21

HPE 3.2TB SAS 12G Mixed Use SFF SC PM5 SSD P04537-B21

HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD P09094-B21

HPE 3.2TB SAS 12G Mixed Use SFF SC PM1645a SSD P19917-B21

HPE 3.84TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD P37017-B21

HPE 3.84TB SAS 12G Mixed Use SFF SC Value SAS RM5 SSD P10460-B21

HPE 6.4TB SAS 12G Mixed Use SFF SC SS540 SSD P21137-B21

HPE 6.4TB SAS 12G Mixed Use SFF SC PM5 SSD P04539-B21

HPE 6.4TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD P09096-B21

HPE 6.4TB SAS 12G Mixed Use SFF SC PM1645a SSD P19919-B21

Mixed Use – SATA – SFF – Solid State Drives

HPE 800GB SAS 24G Mixed Use SFF SC PM6 SSD P26290-B21

HPE 1.6TB SAS 24G Mixed Use SFF SC PM6 SSD P26354-B21

HPE 3.2TB SAS 24G Mixed Use SFF SC PM6 SSD P26358-B21

HPE 6.4TB SAS 24G Mixed Use SFF SC PM6 SSD P26362-B21

HPE 480GB SATA 6G Mixed Use SFF SC Multi Vendor SSD P18432-B21

HPE 480GB SATA 6G Mixed Use SFF SC S4610 SSD P05976-B21

HPE 480GB SATA 6G Mixed Use SFF SC SM883 SSD P09712-B21



Core Options

| | |
|--|------------|
| HPE 480GB SATA 6G Mixed Use SFF SC SE5031 SSD | P13658-B21 |
| HPE 480GB SATA 6G Mixed Use SFF SC 5300M SSD | P19947-B21 |
| HPE 960GB SATA 6G Mixed Use SFF SC Multi Vendor SSD | P18434-B21 |
| HPE 960GB SATA 6G Mixed Use SFF SC S4610 SSD | P05980-B21 |
| HPE 960GB SATA 6G Mixed Use SFF SC SM883 SSD | P09716-B21 |
| HPE 960GB SATA 6G Mixed Use SFF SC SE5031 SSD | P13660-B21 |
| HPE 960GB SATA 6G Mixed Use SFF SC 5300M SSD | P19949-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF SC Multi Vendor SSD | P18436-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF SC S4610 SSD | P05986-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF SC SM883 SSD | P09722-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF SC SE5031 SSD | P13662-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF SC 5300M SSD | P19951-B21 |
| HPE 3.84TB SATA 6G Mixed Use SFF SC Multi Vendor SSD | P18438-B21 |
| HPE 3.84TB SATA 6G Mixed Use SFF SC S4610 SSD | P05994-B21 |
| HPE 3.84TB SATA 6G Mixed Use SFF RW SE5031 SSD | P13664-B21 |
| HPE 3.84TB SATA 6G Mixed Use SFF SC SM883 SSD | P21517-B21 |
| HPE 3.84TB SATA 6G Mixed Use SFF SC 5300M SSD | P19953-B21 |

Performance Mixed Use - NVMe – U.3 - Solid State Drives

| | |
|--|------------|
| HPE 800GB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 CM6 SSD | P20094-B21 |
| HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 CM6 SSD | P20096-B21 |
| HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 CM6 SSD | P20098-B21 |
| HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 CM6 SSD | P20100-B21 |

Mixed Use - NVMe – U.3 - Solid State Drives

| | |
|---|------------|
| HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 PE8030 SSD | P19825-B21 |
| HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 PE8030 SSD | P19829-B21 |
| HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 PE8030 SSD | P19833-B21 |
| HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 PE8030 SSD | P19837-B21 |
| HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 CD6 SSD | P25953-B21 |
| HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 CD6 SSD | P20203-B21 |
| HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 CD6 SSD | P20205-B21 |
| HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 CD6 SSD | P20207-B21 |
| HPE 12.8TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.3 CD6 SSD | P20209-B21 |

Mixed Use – NVMe – SFF – Solid State Drives

| | |
|---|------------|
| HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07179-B21 |
| HPE 800GB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD | P13668-B21 |

Mixed Use – NVMe – SFF – Solid State Drives

| | |
|---|------------|
| HPE 1.6TB NVMe Gen3 High Performance Mixed Use SFF SCN U.2 P4610 SSD | P13699-B21 |
| HPE 1.6TB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD | P13670-B21 |
| HPE 3.2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07183-B21 |
| HPE 3.2TB NVMe Gen3 High Performance Mixed Use SFF SCN U.2 P4610 SSD | P13701-B21 |
| HPE 3.2TB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD | P13672-B21 |
| HPE 6.4TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07185-B21 |
| HPE 6.4TB NVMe Gen3 High Performance Mixed Use SFF SCN U.2 P4610 SSD | P13703-B21 |

Core Options

HPE 6.4TB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD P13674-B21

Notes:

- A NVMe (878366-B21) or Premium (878364-B21) drive cage are required to support these drives in conjunction with an NVMe riser Option. Consult pages 11-13 for recommended NVMe server configurations.
- NVMe drives are not supported by HPE Smart Array controllers.

Dual SATA M.2 – UFF to SFF SCM SSD

HPE Dual 240GB SATA 6G Read Intensive M.2 to SFF SCM 5300B SSD Kit P19894-B21

HPE Dual 480GB SATA 6G Read Intensive M.2 to SFF SCM 5300P SSD Kit P19896-B21

Hard Drive Blank Kits

HPE Small Form Factor Hard Drive Blank Kit 666987-B21

Hard Drive Kits

HPE Universal SATA 6G AIC HHHL M.2 SSD Enablement Kit 878783-B21

NVMe Kit

HPE NS204i-p x2 Lanes NVMe PCIe3 x8 OS Boot Device P12965-B21

HPE Networking

100 Gigabit Ethernet adapters

HPE Ethernet 100Gb 1-port QSFP28 MCX515A-CCAT Adapter 874253-B21

25 Gigabit Ethernet adapters

HPE Ethernet 10/25Gb 2-port SFP28 QL41401-A2G Adapter 867328-B21

HPE Ethernet 10/25Gb 2-port SFP28 BCM57414 Adapter 817718-B21

HPE Ethernet 10/25Gb 2-port SFP28 MCX4121A-ACUT Adapter 817753-B21

10 Gigabit Ethernet adapters

HPE Ethernet 10Gb 2-port BASE-T QL41401-A2G Adapter 867707-B21

HPE Ethernet 10Gb 2-port 548SFP+ Adapter P11338-B21

HPE Ethernet 10Gb 2-port SFP+ QL41401-A2G Adapter P08446-B21

HPE Ethernet 10Gb 2-port SFP+ 57810S Adapter 652503-B21

HPE Ethernet 10Gb 2-port BASE-T 57810S Adapter 656596-B21

10 Gigabit Ethernet adapters

HPE Ethernet 10Gb 2-port BASE-T BCM57416 Adapter 813661-B21

HPE Ethernet 10Gb 2-port BASE-T X550-AT2 Adapter 817738-B21

HPE Ethernet 10Gb 2-port SFP+ X710-DA2 Adapter 727055-B21

Notes:

- A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.
- Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information: <https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>.

1 Gigabit Ethernet adapters

HPE Ethernet 1Gb 4-port BASE-T BCM5719 Adapter 647594-B21

HPE Ethernet 1Gb 4-port BASE-T I350-T4V2 Adapter 811546-B21

HPE Ethernet 1Gb 2-port BASE-T BCM5720 Adapter 615732-B21

HPE Ethernet 1Gb 2-port BASE-T I350-T2V2 Adapter 652497-B21

FlexibleLOM Adapters

HPE Ethernet 1Gb 4-port FLR-T BCM5719 Adapter 629135-B22



Core Options

| | |
|---|------------|
| HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 Adapter | 665240-B21 |
| HPE FlexFabric 10Gb 2-port FLR-T 57810S Adapter | 700759-B21 |
| HPE FlexFabric 10Gb 2-port FLR-SFP+ 57810S Adapter | 700751-B21 |
| HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter | 817721-B21 |
| HPE FlexFabric 10Gb 4-port FLR-T 57840S Adapter | 764302-B21 |
| HPE Ethernet 10Gb 2-port FLR-SFP+ X710-DA2 Adapter | 727054-B21 |
| HPE Ethernet 10Gb 2-port FLR-T X550-AT2 Adapter | 817745-B21 |
| HPE Ethernet 10/25Gb 2-port FLR-SFP28 QL41401-A2G Converged Network Adapter | 867334-B21 |
| HPE Ethernet 10/25Gb 2-port FLR-SFP28 MCX4121A-ACFT Adapter | 817749-B21 |
| HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter | 817709-B21 |

Notes: Please see the NIC QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/us/en/product-catalog/servers/server-adapters.hits-12.html>

HPE InfiniBand

| | |
|--|------------|
| HPE InfiniBand FDR/Ethernet 40/50Gb 2-port 547FLR-QSFP Adapter | 879482-B21 |
| HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter | 825111-B21 |
| HPE InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter | 872726-B21 |

Notes: Not supported on DL580 Gen10 configurations with more than 24SFF bays when system inlet temperature is higher than 25°C.

| | |
|---|------------|
| HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel Omni-Path Architecture Adapter | 829335-B21 |
| HPE InfiniBand EDR 100Gb 1-port 841QSFP28 Adapter | 872725-B21 |
| HPE InfiniBand HDR100/Ethernet 100Gb 1-port QSFP56 PCIe3 x16 MCX653105A-ECAT Adapter | P06250-B21 |
| HPE InfiniBand HDR100/Ethernet 100Gb 2-port QSFP56 PCIe3 x16 MCX653106A-ECAT Adapter | P06251-B21 |

Notes: Not supported on DL580 Gen10 configurations with more than 24SFF bays when system inlet temperature is higher than 25°C.

| | |
|---|------------|
| HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe3 x16 MCX653105A-HDAT Adapter | P06154-B21 |
|---|------------|

Notes: Not supported on DL580 Gen10 configurations with more than 24SFF bays when system inlet temperature is higher than 25°C.

| | |
|--|------------|
| HPE InfiniBand HDR PCIe3 Auxiliary Card with 350mm Cable Kit | P06154-B23 |
|--|------------|

Notes: For additional InfiniBand information: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154440>



Core Options

HPE I/O Expansion Options

HPE DL580 Gen10 2x 4-port 16 NVMe Slimline Riser Kit 878360-B21

Notes:

- HPE DL5x0 Gen10 CPU Mezzanine Board Kit (872222-B21) and requires a 3 or 4 processor configuration to support all 16 NVMe drives.
- Must be selected if more than 8 NVMe drives are selected. It supports upto 16 NVMe drives.
- Does not contain any additional PCIe slots.

HPE DL580 Gen10 6-slot 4 x8/2 x16 2-port 4 NVMe Slimline Primary Riser Kit 872336-B21

HPE DL580 Gen10 7-slot 4 x8/3 x16 Primary Riser Kit 878214-B21

HPE DL580 Gen10 8-slot 6 x8/2 x16 2-port 4 NVMe Slimline Secondary Riser Kit 872338-B21

Notes: Secondary riser kit includes the tertiary riser kit.

HPE DL580 Gen10 9-slot 6 x8/3 x16 Secondary Riser Kit 872340-B21

Notes:

- Includes the tertiary riser kit.
- A maximum of 2 risers can be selected, 1 primary riser and another secondary riser (which includes tertiary riser kit).
- Risers are optional kits which can be utilized depending on riser and processor selection. Refer to “Expansion Slots” section for additional details on risers.
- For more information about riser configuration, please visit:
<https://h20195.www2.hpe.com/v2/Getdocument.aspx?docname=a00043229enw>

HPE Smart I/O Expansion Options

Pensando Distributed Services Platform DSC-25 Enterprise 10/25Gb 2-port SFP28 Card P26966-B21

Pensando Distributed Services Platform Enterprise 1-year Renewal Subscription 24x7 Support E-RTU R6A06AAE

Pensando Distributed Services Platform Enterprise 3-year Subscription 24x7 Support E-RTU R6A07AAE

Pensando Distributed Services Platform Enterprise 4-year Subscription 24x7 Support E-RTU R6F68AAE

Pensando Distributed Services Platform Enterprise 5-year Subscription 24x7 Support E-RTU R6A08AAE

Pensando Distributed Services Platform Enterprise Pro 1-year Renewal Subscription 24x7 Support E-RTU R6A09AAE

Pensando Distributed Services Platform Enterprise Pro 3-year Subscription 24x7 Support E-RTU R6A10AAE

Pensando Distributed Services Platform Enterprise Pro 4-year Subscription 24x7 Support E-RTU R6F69AAE

Pensando Distributed Services Platform Enterprise Pro 5-year Subscription 24x7 Support E-RTU R6A11AAE

HPE Power Supplies

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 830272-B21

Notes:

- Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).
- 1600W Power supplies only support high line voltage (200VAC to 240VAC).

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865414-B21

HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit 865434-B21

Notes:

- The -48VDC power supply cannot be selected with the HPE Persistent Memory kits
- 4x 800W power supplies must be selected.
- Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.
- Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at:
<http://www.hpe.com/info/hppoweradvisor>.

Core Options

- All power supplies in a server should match. Mixing Power Supplies is not supported.
- Option kits contain the specified power supply and a PDU IEC cable.
- HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional HPE power cords.
- DL500 family is identified as Resilient Server category under LOT 9 regulation, system minimum configuration with 2 Memory DIMMs and 2 PSUs for CE Market.

HPE Computational Accelerators

| Part number | Card | Qty support | Processor support | PCIe speed |
|-------------|------------------------------------|-------------|-------------------|------------|
| Q0V80C | NVIDIA Tesla P40 24GB Module | 4 | All | Gen3 |
| Q9U36C | NVIDIA Tesla V100 PCIe 32GB Module | 4 | All | Gen3 |
| R0Z45C | HPE NVIDIA Quadro RTX6000 GPU | 4 | All | Gen3 |
| R1F97C | HPE NVIDIA Quadro RTX8000 GPU | 4 | All | Gen3 |

Notes:

- Check the power usage via the HPE Power Advisor Tool located at <http://www.hpe.com/info/hppoweradvisor>.
- A maximum of four GPU cards can be supported, two in primary riser expansion slots (2 and 4) and another two in secondary riser expansion slots (9 and 11). A GPU bracket (P00268-B21) kit is needed to install GPUs in slots 4 and 11 and must be ordered along with the GPU cable kits 871829-B21 (for P40, V100). Refer Expansion Slots sections for additional details on risers.
- Primary riser expansion slots 2 and 4 are connected to Processor 3. Secondary riser expansion slots 9 and 11 are connected to Processor 4. This mandates a minimum of 3 processors for a 2 GPU configuration and 4 processors for a 4 GPU configuration. Refer to Expansion slots to review processor and slots availability.
- 1 cable kit supports three GPUs and two cable kits must be ordered when supporting four GPUs.

GPGPU Thermal considerations

Server configurations employing GPGPU Accelerators may require additional thermal considerations due to their operating power and the thermal cooling solution employed (on-card active fan or passive heat sink). Support of GPGPU server configurations with multiple storage devices guaranteeing full GPGPU performance requires the server configured as outlined in the following table restricting inlet air temperatures as follows:

| Card | P40 | 32GB V100 | Recommended DL580 Drive bay configuration | | | |
|-----------------------------|---------------|---------------|---|--------|-------------|-----|
| Part number | Q0V80C | Q9U36C | | | | |
| Qty | 4 | 4 | | | | |
| Processors supported | All | All | 8 SFF | 8 NVMe | 6+2 Premium | UMB |
| 8SFF | 35C | 35C | Bay 1 | | | |
| 16SFF | 35C | 30C | Bay 1 and 4 | | | |
| 24SFF | 35C | 30C | Bay 1, 4 and 5 | | | |
| 32SFF | 35C | 30C | Bay 1, 4, 5 and 6 | | | |
| 40SFF | 25C | 25C | Bay 1, 2, 4, 5 and 6 | | | |
| 48SFF | Not supported | Not supported | | | | |

| Card | P40 | 32GB V100 | Recommended DL580 Drive bay configuration | | | |
|--------------------------------|---------------|---------------|---|--|-------|-------|
| 1 Premium (6+2) | 35C | 25C | | | Bay 2 | |
| 1 Premium (6+2) + 8SFF | 35C | 25C | Bay 1 | | | Bay 2 |
| 1 Premium (6+2) + 6SFF | 35C | 25C | Bay 1 and 4 | | | Bay 2 |
| 1 Premium (6+2) + 4SFF | 25C | 25C | Bay 1, 4 and 5 | | | Bay 2 |
| 1 Premium (6+2) + 32SFF | Not supported | Not supported | Bay 1, 4, 5 and 6 | | | Bay 2 |
| 1 Premium (6+2) + 40SFF | Not supported | Not supported | | | | |



Core Options

| Card | P40 | 32GB V100 | Recommended DL580 Drive bay configuration | | |
|-------------------------------|---------------|---------------|---|-------|----------------|
| 2 Premium (6+2) | 30C | 25C | | | Bay 2 and 3 |
| 2 Premium (6+2) + 8SFF | 25C | 25C | Bay 1 | | Bay 2 and 3 |
| 2 Premium (6+2) 16SFF | 25C | 25C | Bay 1 and 4 | | Bay 2 and 3 |
| 2 Premium (6+2) + 4SFF | Not supported | Not supported | Bay 1, 4, and 6 | | Bay 2 and 3 |
| Card | P40 | 32GB V100 | Recommended DL580 Drive bay configuration | | |
| 2 Premium (6+2) + 2SFF | Not supported | Not supported | | | |
| 3 Premium (6+2) | 25C | 25C | | | Bay 1, 2 and 3 |
| 3 Premium (6+2) + 8SFF | 25C | 25C | Bay 4 | | Bay 1, 2 and 3 |
| 3 Premium (6+2) + 6SFF | Not supported | Not supported | Bay 4 and 6 | | Bay 1, 2 and 3 |
| 3 Premium (6+2) + 4SFF | Not supported | Not supported | | | |
| 8NVMe | 35C | 25C | | Bay 2 | |

| Card | P40 | 32GB V100 | Recommended DL580 Drive bay configuration | | |
|--------------------------|---------------|---------------|---|--|-------|
| Media Bay | 35C | 35C | | | Bay 4 |
| Media Bay + 8SFF | 35C | 35C | Bay 1 | | Bay 4 |
| Media Bay + 16SFF | 35C | 30C | Bay 1 and 5 | | Bay 4 |
| Media Bay + 24SFF | 35C | 30C | Bay 1, 5 and 6 | | Bay 4 |
| Media Bay + 32SFF | 25C | 25C | Bay 1, 2, 5 and 6 | | Bay 4 |
| Media Bay + 40SFF | Not supported | Not supported | | | |

| Card | P40 | 32GB V100 | Recommended DL580 Drive bay configuration | | |
|----------------------|---------------|---------------|---|-------|--|
| 8NVMe + 8SFF | 35C | 25C | Bay 1 | Bay 2 | |
| 8NVMe + 16SFF | 35C | 25C | Bay 1 and 4 | Bay 2 | |
| 8NVMe + 24SFF | 25C | 25C | Bay 1, 4 and 5 | Bay 2 | |
| 8NVMe + 32SFF | Not supported | Not supported | Bay 1, 4, 5 and 6 | Bay 2 | |
| 8NVMe + 40SFF | Not supported | Not supported | | | |
| 16NVMe | Not supported | Not supported | | | |
| 16NVMe +8SFF | Not supported | Not supported | | | |
| 16NVMe +16SFF | Not supported | Not supported | | | |
| 16NVMe +24SFF | Not supported | Not supported | | | |
| 16NVMe +32SFF | Not supported | Not supported | | | |
| 20NVMe | Not supported | Not supported | | | |
| 20NVMe+8SFF | Not supported | Not supported | | | |
| 20NVMe+16SFF | Not supported | Not supported | | | |
| 20NVMe+24SFF | Not supported | Not supported | | | |

| Card | P40 | 32GB V100 | Recommended DL580 Drive bay configuration | | |
|--------------------------------|---------------|---------------|---|--|-------------|
| 1 Premium (6+2) + 32SFF | Not supported | Not supported | Bay 1, 4, 5 and 6 | | Bay 2 |
| 1 Premium (6+2) + 40SFF | Not supported | Not supported | | | |
| 2 Premium (6+2) | 30C | 25C | | | Bay 2 and 3 |
| 2 Premium (6+2) + 8SFF | 25C | 25C | Bay 1 | | Bay 2 and 3 |
| 2 Premium (6+2) + 16SFF | 25C | 25C | Bay 1 and 4 | | Bay 2 and 3 |
| 2 Premium (6+2) + 24SFF | Not supported | Not supported | Bay 1, 4, and 6 | | Bay 2 and 3 |
| 2 Premium (6+2) + 32SFF | Not supported | Not supported | | | |



Core Options

| Card | P40 | 32GB V100 | Recommended DL580 Drive bay configuration | | | |
|-------------------------|---------------|---------------|---|--------|-------------|-------|
| Part number | Q0V80C | Q9U36C | | | | |
| Qty | 2 | 2 | | | | |
| Processor supported | All | All | 8 SFF | 8 NVMe | 6+2 Premium | UMB |
| 8SFF | 35C | 35C | Bay 1 | | | |
| 16SFF | 35C | 30C | Bay 1 and 4 | | | |
| 24SFF | 35C | 30C | Bay 1, 4 and 5 | | | |
| 32SFF | 35C | 30C | Bay 1, 4, 5 and 6 | | | |
| 40SFF | 25C | 25C | Bay 1, 2, 4, 5 and 6 | | | |
| 48SFF | Not supported | Not supported | | | | |
| 1 Premium (6+2) | 35C | 25C | | | | Bay 2 |
| 1 Premium (6+2) + 8SFF | 35C | 25C | Bay 1 | Bay 2 | | |
| 1 Premium (6+2) + 16SFF | 35C | 25C | Bay 1 and 4 | Bay 2 | | |
| 1 Premium (6+2) + 24SFF | 25C | 25C | Bay 1, 4 and 5 | Bay 2 | | |

| Card | P40 | 32GB V100 | Recommended DL580 Drive bay configuration | | | |
|-------------------|---------------|---------------|---|----------------|--|----------------|
| 16NVMe+24SFF | Not supported | Not supported | Bay 1, 4 and 6 | Bay 2 and 3 | | |
| 16NVMe+32SFF | Not supported | Not supported | | | | |
| 20NVMe | 25C | Not supported | | | | Bay 1, 2 and 3 |
| 20NVMe+8SFF | 25C | Not supported | Bay 4 | Bay 1, 2 and 3 | | |
| 20NVMe+16SFF | Not supported | Not supported | Bay 4 and 6 | Bay 1, 2 and 3 | | |
| 20NVMe+24SFF | Not supported | Not supported | | | | |
| Media Bay | 35C | 35C | | | | Bay 4 |
| Media Bay + 8SFF | 35C | 35C | Bay 1 | Bay 4 | | |
| Media Bay + 16SFF | 35C | 30C | Bay 1 and 5 | Bay 4 | | |
| Media Bay + 24SFF | 35C | 30C | Bay 1, 5 and 6 | Bay 4 | | |
| Media Bay + 32SFF | 25C | 25C | Bay 1, 2, 5 and 6 | Bay 4 | | |
| Media Bay + 40SFF | Not supported | Not supported | | | | |

| Card | P40 | 32GB V100 | Recommended DL580 Drive bay configuration | | | |
|-------------------------|---------------|---------------|---|----------------|--|----------------|
| 3 Premium (6+2) | 25C | 25C | | | | Bay 1, 2 and 3 |
| 3 Premium (6+2) + 8SFF | 25C | 25C | Bay 4 | Bay 1, 2 and 3 | | |
| 3 Premium (6+2) + 16SFF | Not supported | Not supported | Bay 4 and 6 | Bay 1, 2 and 3 | | |
| 3 Premium (6+2) + 24SFF | Not supported | Not supported | | | | |
| 8NVMe | 35C | 25C | | | | Bay 2 |
| 8NVMe + 8SFF | 35C | 25C | Bay 1 | Bay 2 | | |
| 8NVMe + 16SFF | 35C | 25C | Bay 1 and 4 | Bay 2 | | |
| 8NVMe + 24SFF | 25C | 25C | Bay 1, 4 and 5 | Bay 2 | | |
| 8NVMe + 32SFF | Not supported | Not supported | Bay 1, 4, 5 and 6 | Bay 2 | | |
| 8NVMe + 40SFF | Not supported | Not supported | | | | |
| 16NVMe | 30C | Not supported | | | | Bay 2 and 3 |
| 16NVMe +8SFF | 25C | Not supported | Bay 1 | Bay 2 and 3 | | |
| 16NVMe +16SFF | 25C | Not supported | Bay 1 and 4 | Bay 2 and 3 | | |



Core Options

| Card | RTX8000 | RTX6000 | Recommended DL580 Drive bay configuration | | | |
|--------------------------------|---------|---------|---|--------|----------------|-------|
| Part number | R1F97C | ROZ45C | | | | |
| Qty | 2/4 | 2/4 | | | | |
| Processors supported | All | All | 8 SFF | 8 NVMe | 6+2 Premium | UMB |
| 8SFF | 35C | 35C | Bay 1 | | | |
| 16SFF | 35C | 35C | Bay 1 and 4 | | | |
| 24SFF | 35C | 35C | Bay 1, 4 and 5 | | | |
| 32SFF | 35C | 35C | Bay 1, 4, 5 and 6 | | | |
| 40SFF | 35C | 35C | Bay 1, 2, 4, 5 and 6 | | | |
| 48SFF | 35C | 35C | Bay 1-6 | | | |
| Card | RTX8000 | RTX6000 | Recommended DL580 Drive bay configuration | | | |
| Qty | 2/4 | 2/4 | | | | |
| 1 Premium (6+2) | 35C | 35C | | | Bay 2 | |
| 1 Premium (6+2) + 8SFF | 35C | 35C | Bay 1 | | Bay 2 | |
| 1 Premium (6+2) + 16SFF | 35C | 35C | Bay 1 and 4 | | Bay 2 | |
| 1 Premium (6+2) + 24SFF | 35C | 35C | Bay 1, 4 and 5 | | Bay 2 | |
| 1 Premium (6+2) + 32SFF | 35C | 35C | Bay 1, 4, 5 and 6 | | Bay 2 | |
| 1 Premium (6+2) + 40SFF | 35C | 35C | Bay 1, 3, 4, 5 and 6 | | Bay 2 | |
| Card | RTX8000 | RTX6000 | Recommended DL580 Drive bay configuration | | | |
| Qty | 2/4 | 2/4 | | | | |
| 2 Premium (6+2) | 35C | 35C | | | Bay 2 and 3 | |
| 2 Premium (6+2) + 8SFF | 35C | 35C | Bay 1 | | Bay 2 and 3 | |
| 2 Premium (6+2) 16SFF | 35C | 35C | Bay 1 and 4 | | Bay 2 and 3 | |
| 2 Premium (6+2) + 24SFF | 35C | 35C | Bay 1, 4, and 6 | | Bay 2 and 3 | |
| 3 Premium (6+2) + 32SFF | 35C | 35C | Bay 1, 4, 5 and 6 | | Bay 2 and 3 | |
| 3 Premium (6+2) | 35C | 35C | | | Bay 1, 2 and 3 | |
| 3 Premium (6+2) + 8SFF | 35C | 35C | Bay 4 | | Bay 1, 2 and 3 | |
| 3 Premium (6+2) + 16SFF | 35C | 35C | Bay 4 and 6 | | Bay 1, 2 and 3 | |
| 3 Premium (6+2) + 24SFF | 35C | 35C | | | | |
| Card | RTX8000 | RTX6000 | Recommended DL580 Drive bay configuration | | | |
| Qty | 2/4 | 2/4 | | | | |
| Media Bay | 35C | 35C | | | | Bay 4 |
| Media Bay + 8SFF | 35C | 35C | Bay 1 | | | Bay 4 |
| Media Bay + 16SFF | 35C | 35C | Bay 1 and 5 | | | Bay 4 |
| Media Bay + 24SFF | 35C | 35C | Bay 1, 5 and 6 | | | Bay 4 |
| Media Bay + 32SFF | 35C | 35C | Bay 1, 2, 5 and 6 | | | Bay 4 |
| Media Bay + 40SFF | 35C | 35C | Bay 1, 2, 3, 5 and 6 | | | Bay 5 |



Core Options

| Card | RTX8000 | RTX6000 | Recommended DL580 Drive bay configuration | |
|---------------|---------|---------|---|-------|
| Qty | 2/4 | 2/4 | | |
| 8NVMe | 35C | 35C | | Bay 2 |
| 8NVMe + 8SFF | 35C | 35C | Bay 1 | Bay 2 |
| 8NVMe + 16SFF | 35C | 35C | Bay 1 and 4 | Bay 2 |
| 8NVMe + 24SFF | 35C | 35C | Bay 1, 4 and 5 | Bay 2 |
| 8NVMe + 32SFF | 35C | 35C | Bay 1, 4, 5 and 6 | Bay 2 |
| 8NVMe + 40SFF | 35C | 35C | Bay 1, 3, 4, 5 and 6 | Bay 2 |

| Card | RTX8000 | RTX6000 | Recommended DL580 Drive bay configuration | |
|---------------|---------|---------|---|----------------|
| Qty | 2 | 2 | | |
| 16NVMe | 35C | 35C | | Bay 2 and 3 |
| 16NVMe +8SFF | 35C | 35C | Bay 1 | Bay 2 and 3 |
| 16NVMe +16SFF | 35C | 35C | Bay 1 and 4 | Bay 2 and 3 |
| 16NVMe +24SFF | 35C | 35C | Bay 1, 4 and 6 | Bay 2 and 3 |
| 16NVMe +32SFF | 35C | 35C | Bay 1, 4, 5 and 6 | Bay 2 and 3 |
| 20NVMe | 35C | 35C | | Bay 1, 2 and 3 |
| 20NVMe+8SFF | 35C | 35C | Bay 4 | Bay 1, 2 and 3 |
| 20NVMe+16SFF | 35C | 35C | Bay 4 and 6 | Bay 1, 2 and 3 |
| 20NVMe+24SFF | 35C | 35C | Bay 4, 5 and 6 | Bay 1, 2 and 3 |

| Card | RTX8000 | RTX6000 | Recommended DL580 Drive bay configuration | |
|---------------|---------------|---------------|---|--|
| Qty | 4 | 4 | | |
| 16NVMe | Not supported | Not supported | | |
| 16NVMe +8SFF | Not supported | Not supported | | |
| 16NVMe +16SFF | Not supported | Not supported | | |
| 16NVMe +24SFF | Not supported | Not supported | | |
| 16NVMe +32SFF | Not supported | Not supported | | |
| 20NVMe | Not supported | Not supported | | |
| 20NVMe+8SFF | Not supported | Not supported | | |
| 20NVMe+16SFF | Not supported | Not supported | | |
| 20NVMe+24SFF | Not supported | Not supported | | |



Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

iLO Advanced

| | |
|--|------------|
| HPE iLO Common Password FIO Setting | P08040-B21 |
| HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features | E6U59ABE |
| HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features | E6U64ABE |
| HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features | BD505A |
| HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features | BD506A |
| HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features | BD507A |
| HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features | 512485-B21 |

Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services

HPE Converged Infrastructure Management Software

HPE OneView Advanced (with HPE iLO Advanced)

| | |
|--|----------|
| HPE OneView including 3yr 24x7 Support Physical 1-server LTU | E5Y34A |
| HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU | E5Y35AAE |
| HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU | E5Y43A |

HPE OneView Advanced (without HPE iLO Advanced)

| | |
|--|----------|
| HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU | P8B24A |
| HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU | P8B25A |
| HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU | P8B26AAE |

Notes:

- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>.
- Electronic and flexible-quantity licenses can be used to purchase multiple licenses with a single activation key.
- Please see the [HPE OneView QuickSpecs](#) for technical specifications and additional information.

HPE PCIe Workload Accelerator Options

HPE Mixed Use PCIe Workload Accelerator

| | |
|---|------------|
| HPE 1.6TB NVMe Gen4 x8 High Performance Mixed Use AIC HHHL PM1735 SSD | P26934-B21 |
| HPE 3.2TB NVMe Gen4 x8 High Performance Mixed Use AIC HHHL PM1735 SSD | P26936-B21 |
| HPE 1.6TB NVMe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card | P10264-B21 |
| HPE 6.4TB NVMe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card | P10268-B21 |

HPE Write Intensive PCIe Workload Accelerator

| | |
|---|------------|
| HPE 750GB NVMe Gen3 x4 High Performance Low Latency Write Intensive AIC HHHL P4800X SSD | 878038-B21 |
|---|------------|

Notes: Please see the [HPE PCIe Workload Accelerators for ProLiant Servers QuickSpecs](#) for Technical Specifications and additional information.



Additional Options


HPE Security

| | |
|--|------------|
| HPE Trusted Platform Module 2.0 Gen10 Option | 864279-B21 |
| HPE Gen10 Chassis Intrusion Detection Kit | 867824-B21 |
| HPE Bezel Lock Kit | 875519-B21 |
| OEM Gen10 4U Bezel Kit | 869873-B21 |
| HPE Gen10 4U Bezel Kit | 869872-B21 |
| HPE Gen10 4U Bezel Kit | 869872-B21 |

Notes: HPE Trusted Platform Module 2.0 Option (864279-B21) works with Gen10 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen9 servers or earlier generation variants. HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

HPE Smart Array Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

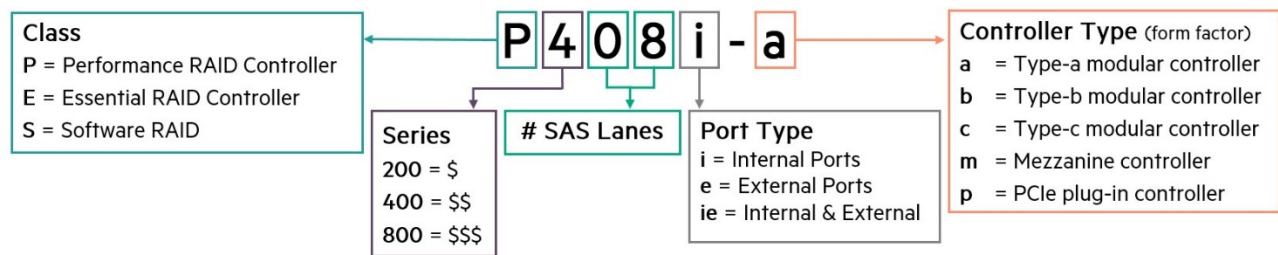

Performance RAID Controllers

Notes:

- HPE 96W Smart Storage Battery (up to 20 Devices) with 145mm Cable Kit (P01366-B21), which supports multiple devices and is sold separately.
- Only standup controllers are supported and there is no support for AROC controllers.

| | |
|---|------------|
| HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller | 830824-B21 |
| HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller | 804405-B21 |

Essential RAID Controllers

| | |
|--|------------|
| HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller | 804398-B21 |
| HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller | 804394-B21 |

Optional Software

| | |
|---|----------|
| HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU | Q2F26AAE |
| HPE Smart Array SR SmartCache (Single Key/Single Server) LTU | D7S26A |
| HPE Smart Array SR SmartCache (Single Key/Multiple Servers) LTU | D7S27A |
| HPE Smart Array SR SmartCache (Single Key/Multiple Servers) E-LTU | D7S27AAE |

Notes: SmartCache is offered on HPE Smart Array performance RAID controllers.

Optional Upgrades

| | |
|--|------------|
| HPE 96W Smart Storage Lithium-ion Battery with 145mm Cable Kit | P01366-B21 |
|--|------------|

Notes: Provides backup power for multiple HPE Smart Array controllers or other devices. Is required with performance RAID controllers.



Additional Options

HPE Tape Backup

For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hpe.com/storage/storeever>.

For hardware and software compatibility of Hewlett Packard Enterprise tape backup products: <http://www.hpe.com/storage/BURACompatibility>.

HPE Storage Options

Emulex Fibre Channel HBAs

| | |
|---|--------|
| HPE SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter | Q0L13A |
| HPE SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter | Q0L14A |
| HPE SN1600E 32Gb Single Port Fibre Channel Host Bus Adapter | Q0L11A |
| HPE SN1600E 32Gb Dual Port Fibre Channel Host Bus Adapter | Q0L12A |

QLogic Fibre Channel HBAs

| | |
|---|--------|
| HPE SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter | P9D93A |
| HPE SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter | P9D94A |
| HPE SN1600Q 32Gb Single Port Fibre Channel Host Bus Adapter | P9M75A |
| HPE SN1600Q 32Gb Dual Port Fibre Channel Host Bus Adapter | P9M76A |
| HPE SN1610E 32Gb 1-port Fibre Channel Host Bus Adapter | R2J62A |
| HPE SN1610E 32Gb 2-port Fibre Channel Host Bus Adapter | R2J63A |
| HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter | R2E08A |
| HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter | R2E09A |

Converged Network Adapter

| | |
|---|--------|
| HPE CN1200R 10GBASE-T Converged Network Adapter | Q0F26A |
| HPE CN1300R 10/25Gb Dual Port Converged Network Adapter | Q0F09A |

HPE Racks

- Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
- Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
- Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Power Distribution Units (PDUs)

- Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).
- Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.



Additional Options

- Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

HPE Rack Options

- Please see the [HPE KVM Switches web page](#) for information on these products and their specifications.

Rail Kits

HPE DL580 Gen10 4U Rail Kit with Cable Management Arm

872151-B21

HPE USB and SD Options

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 32GB microSD RAID 1 USB Boot Drive

P21868-B21

HPE 32GB microSD Flash Memory Card

700139-B21

Notes: Please see the [HPE Flash Media Kits QuickSpecs](#) for additional information.

HPE Support Services

Tech Care

HPE 5 Year Tech Care Essential DL580 Gen10 Service

HV5S9E

HPE 5 Year Tech Care Essential with DMR DL580 Gen10 Service

HV5T4E

HPE 3 Year Tech Care Essential DL580 Gen10 Service

HV5S7E


HPE 3 Year Tech Care Essential with DMR DL580 Gen10 Service

HV5T2E

Notes: For a full listing of support services available for this server, please visit <http://www.hpe.com/services>.



Memory

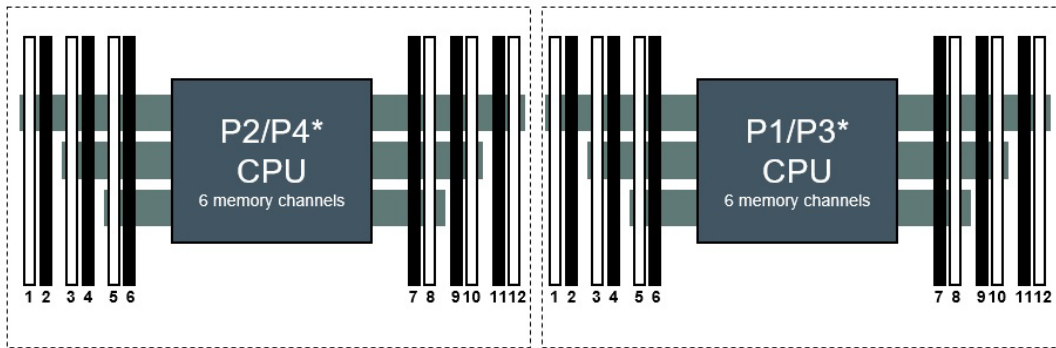

HPE DL360/DL380/DL560*/DL580* Gen10 Servers (2 slots per channel)

Notes:*HPE ProLiant DL580 is a 4 socket server (uses P3, P4)

| | | | | | | | | | | | | |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|
| 1 DIMM | | | | | | | | 8 | | | | |
| 2 DIMM s | | | | | | | | 8 | | 10 | | |
| 3 DIMM s | | | | | | | | 8 | | 10 | | 12 |
| 4 DIMM s | | | 3 | | 5 | | | 8 | | 10 | | |
| 5 DIMM s* | | | 3 | | 5 | | | 8 | | 10 | | 12 |
| 6 DIMM s | 1 | | 3 | | 5 | | | 8 | | 10 | | 12 |
| 7 DIMM s* | 1 | | 3 | | 5 | | 7 | 8 | | 10 | | 12 |
| 8 DIMM s | | | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | | |
| 9 DIMM s* | 1 | | 3 | | 5 | | 7 | 8 | 9 | 10 | 11 | 12 |
| 10 DIMM s* | 1 | | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | | 12 |
| 11 DIMM s* | 1 | | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| 12 DIMM s | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |

HPE ProLiant Gen10 12 slot per CPU DIMM Population Order

Notes:*Unbalanced, not recommended

Memory Population guidelines

General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.

For details on the HPE Server Memory Options Population Rules, visit: <http://www.hpe.com/docs/memory-population-rules>.

To realize the performance memory capabilities listed in this document, HPE DDR4 SmartMemory is required.

For additional information, please see the [HPE DDR4 SmartMemory QuickSpecs](#).



Memory

Memory Speed Table for HPE ProLiant DL580 Gen 10

For the HPE Server Memory speed table, please visit: <https://www.hpe.com/docs/memory-speed-table>

| Standard and Maximum Memory Capacity (Pre-configured Models) | | | |
|--|--------------------|-------------------------------------|---|
| Pre Configured Models | Standard Memory | Maximum Memory Plus Optional Memory | Standard Memory Replaced with Optional Memory |
| 5120 | 64 GB (4 x16 GB) | 384 GB (24 x16 GB) | 6144GB (48 x128 GB) |
| 6148 | 128 GB (8 x16 GB) | 384 GB (48 x16 GB) | 6144GB (48 x128 GB) |
| 8164 | 256 GB (8 x32 GB) | 1536 GB (48 x32 GB) | 6144GB (48 x128 GB) |
| 5220 | 128 GB (4 x32 GB) | 768 GB (24 x32 GB) | 6144GB (48 x128 GB) |
| 6230 | 256 GB (8 x32 GB) | 1536 GB (48 x32 GB) | 6144GB (48 x128 GB) |
| 8260 | 512 GB (16 x32 GB) | 1536 GB (48 x32 GB) | 6144GB (48 x128 GB) |

DDR4 memory options part number decoder

Notes: Capacity references are rounded to the common gigabyte (GB) values.

- 4 GB = 4,096 MB
- 8 GB = 8,192 MB
- 16 GB = 16,384 MB
- 32 GB = 32,768 MB
- 64 GB = 65,536 MB
- 128 GB = 131,072 MB

For more information on memory, please see the Memory Quickspecs: [HPE DDR4 SmartMemory](#)



Storage



40 SFF hot-plug drive model and 2 NVMe SSDs with Universal Media Bay



Technical Specifications

System Unit

Dimensions

- **(H x W x D)** (with bezel)
17.48cm x 44.55cm x 75.18cm
6.88 x 17.54 x 29.60 in

Weight (approximate)

- **Maximum:** (all hard drives, power supplies, DIMMs and processors installed)
 - 51.71 kg
 - 114 lb
- **Minimum:** (One processor, one standard heatsink, one air baffle, one hard drive, two power supply, one DIMM, one NIC one rail kit with CMA and one primary riser installed)
 - 28.12 kg
 - 62 lb

Input Requirements (per power supply)

- **Rated Input Voltage**
 - 100 - 127 VAC, 200 – 240 VAC, 240VDC for China Only (800W Platinum PS only)
 - -40 VDC to -72 VDC, -48 VDC nominal input (800W -48VDC PS only)
 - 200 - 240 VAC, 240 VDC for China only (1600W PS only)
- **Rated Input Current**
 - 9.4 A (100 VAC), 4.5 A (200 VAC), 3.8 A at 240VDC for China only (800W Platinum PS only)
 - 26 A at -40 VDC input, 19 A at -48 VDC input, nominal input, 12.4 A at -72 VDC input - (800W -48VDC PS only)
 - 8.7 A at 200 VAC, 7.2 A at 240 VAC - (1600W PS only)
- **Rated Input Frequency**
 - 50 to 60 Hz (Not applicable for VDC ranges)
- **Maximum Rated Input Power**
 - 940 W (100 VAC), 900 W (200VAC), 912 W at 240 VDC for China only - (800W Platinum PS only)
 - 936 W at -40 VDC input 912 W at -48 VDC input, nominal input 900 W at -72 VDC input - (800W -48VDC PS only)
 - 1734 W at 200 VAC 1720 W at 240 VAC - (1600W PS only)

BTU Rating

Maximum

- 3207 BTU/hr at 100 VAC, 3071 BTU/hr at 200 VAC, 3112 BTU/hr at 240 for China only - (800W Platinum PS only)
 - 3194 BTU/hr at -40 VDC input, 3112 BTU/hr at -48 VDC input (nominal input), 3071 BTU/hr at -72VDC input - (800W -48VDC PS only)
 - 5918 BTU/hr at 200 VAC, 5884 BTU/hr at 240 VAC - (1600W PS only)
-



Technical Specifications

Power Supply Output (per power supply)

- **Rated Steady-State Power**
 - 800 W at 100 VAC to 127 VAC input, 800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Platinum PS only)
 - 800 W at -40 VDC to -72 VDC - (800W -48VDC PS only)
 - 1600 W at 200 VAC to 240 VAC input, 1600 W at 240 VDC input - (1600W PS only)
- **Maximum Peak Power**
 - 800 W at 100 VAC to 127 VAC input, 800 W at 200 VAC to 240 VAC input, 800 W at 240 VDC input for China only - (800W Platinum PS only)
 - 800 W at -40 VDC to -72 VDC - (800W -48VDC PS only)
 - 2200 W for 1ms (turbo mode) at 200 VAC to 240 VAC input - (1600W PS only)

Notes: To review typical system power ratings use the HPE Power Advisor which is available online located at url: <http://www.hpe.com/info/hppoweradvisor>.

System Inlet Temperature

- **Standard Operating Support**
10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
- **Extended Ambient Operating Support**
For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hpe.com/servers/ashrae>

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.
- **Non-operating**
-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

Relative Humidity(non-condensing)

- **Operating**
8% to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
- **Non-operating**
5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Altitude

- **Operating**
3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
- **Non-operating**
9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).



Technical Specifications

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

| Product Configuration | Entry | Base | Performance |
|-----------------------|--------|--------|-------------|
| Idle - LWAd | 5.4 B | 5.4 B | 5.3 B |
| Idle - LpAm | 37 dBA | 36 dBA | 36 dBA |
| Operating - LWAd | 5.8 B | 6.1 B | 6.1 B |
| Operating - LpAm | 39 dBA | 43 dBA | 44 dBA |

Notes: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

HPE Smart Array

Please refer to the appropriate QuickSpecs listed below for technical specifications on controllers.

For latest information on **HPE Smart Array Gen10 Controllers for HPE ProLiant DL, ML and Apollo Servers** please refer to their QuickSpecs. (E208i-a,E208i-p,E208e-p,P408i-a,P408i-p,P408e-p,P816i-a)

Environment-friendly Products and Approach End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs** in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.



Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|--|
| 06-Apr-2021 | Version 36 | Changed | Standard Features, Service and Support and Additional Options sections were updated. Obsolete SKUs were removed. |
| 01-Feb-2021 | Version 35 | Changed | Core Options sections was updated. Obsolete SKUs were removed. |
| 07-Dec-2020 | Version 34 | Changed | Optional Features and Core Options sections were updated. Obsolete SKUs were removed. |
| 02-Nov-2020 | Version 33 | Changed | Standard Features and Pre-configured Models sections were updated. Obsolete SKUs were removed. |
| 05-Oct-2020 | Version 32 | Changed | Core Options section was updated. Obsolete SKUs were removed. |
| 03-Aug-2020 | Version 31 | Changed | Overview, Standard Features, Core Options, Additional Options and Memory sections were updated. Obsolete SKUs were removed. |
| 20-Jul-2020 | Version 30 | Changed | Standard Features section was updated. |
| 01-Jun-2020 | Version 29 | Changed | Configuration Information and Core Options sections were updated. |
| 04-May-2020 | Version 28 | Changed | Pre-configured Models section was updated. |
| 06-Apr-2020 | Version 27 | Changed | Configuration Information and Core Options sections were updated. |
| 24-Feb-2020 | Version 26 | Changed | Add in GPU configuration rule Service and Support and Core Options sections were updated Overview, Standard Features, Pre-configured Models, Core Options and Configuration Information sections were updated. Obsolete SKUs was removed. |
| 02-Dec-2019 | Version 25 | Changed | Core Options and Additional Options sections were updated. SKUs were updated. Obsolete SKUs were removed from the QuickSpecs. |
| 04-Nov-2019 | Version 24 | Changed | Memory section was updated. Obsolete SKUs were removed. |
| 07-Oct-2019 | Version 23 | Changed | Overview, Standard Features, Optional Features, Configuration Information, Core Options sections were updated. Obsolete SKU was removed. Remove some 1 st Generation Intel Xeon processors Removed Nvidia P6000, P100 and V100 16GB GPGPUs Added new SATA and NVMe drives |
| 12-Aug-2019 | Version 22 | Changed | Additional Options section was updated. |
| 05-Aug-2019 | Version 21 | Changed | Overview, Standard features, Configuration information, Core options, and Technical specifications sections were updated. Obsolete SKUs were removed. |
| 01-Jul-2019 | Version 20 | Changed | The 5218N wattage has changed from 105 to 110W The U.S. version of QuickSpecs is no longer being updated, please reference the Worldwide QuickSpecs for latest information. |
| 03-Jun-2019 | Version 19 | Changed | Overview, Standard Features, Configuration Information and Core Options sections were updated. |
| 18-Apr-2019 | Version 18 | Changed | SKUs were updated. |
| 15-Apr-2019 | Version 17 | Changed | Standard Features, Pre-configured Models and Core Options sections were updated. |
| 02-Apr-2019 | Version 16 | Changed | Overview, Standard Features, Optional Features, Configuration Information, Pre-configured Models, Core Options and Memory sections were updated. |
| 04-Feb-2019 | Version 15 | Changed | Optional Features and Core Options sections were updated. Obsolete SKUs were removed. |



Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|--|
| 17-Dec-2018 | Version 14 | Changed | Processor 8158 was listed in Standard Features Section |
| 03-Dec-2018 | Version 13 | Changed | Core Options, Standard Features, Optional Features, Configuration Information Additional Options were Updated. SKUs descriptions were updated, Obsolete SKUs were removed from the QuickSpecs. |
| 15-Oct-2018 | Version 12 | Changed | Core Options, Additional Options were Updated. SKUs descriptions were updated, Obsolete SKUs were removed from the QuickSpecs. |
| 01-Oct-2018 | Version 11 | Changed | Overview, Pre Configured models. Configuration Information, Core Options and Additional Options sections were updated. SKUs were added. SKUs descriptions were updated, |
| 06-Aug-2018 | Version 10 | Changed | Updated the list of supported operating systems. Configuration Information – Factory Integrated Models, Core Options, and Additional Options were revised. |
| 02-Jul-2018 | Version 9 | Added | Added drive population guideline table with GPUs. |
| 04-Jun-2018 | Version 8 | Changed | Added HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features. New HPE Smart Array P824i-p MR Gen10 (24 Internal Lanes/4GB Cache/CacheCade) 12G SAS PCIe Controller was added. New 375GB NVMe WI drive and 750GB PCIE accelerator were added. Configuration Information – Factory Integrated Models, Core Options, Additional Options, Service and Support, and Memory were revised. Obsolete SKUs were removed from the QuickSpecs. |
| 02-Apr-2018 | Version 7 | Changed | Standard Features, Configuration Information – Factory Integrated Models and Core Options were revised. SKUs descriptions were updated. |
| 05-Mar-2018 | Version 6 | Changed | Front view image, Expansion Slots, Internal Storage Devices, Standard Features, and Storage section were revised. |
| 05-Feb-2018 | Version 5 | Changed | Added new SSD offering. GPU slots and Maximum Internal Storage were revised. Core Options and Additional Options were revised. Obsolete SKUs were removed from the QuickSpecs. |
| 18-Dec-2017 | Version 4 | Changed | Configuration Information – Factory Integrated Models and Core Options were revised. |
| 04-Dec-2017 | Version 3 | Changed | Added support for new core boosting Intel® Xeon® Processors 6143 and 8165. Added support for up to 24 16GB NVDIMM. Processors, Memory, and Acoustic Noise were revised. |
| 16-Oct-2017 | Version 2 | Added | Added note – 1600W Power supplies only support high line voltage (200VAC to 240VAC) – to power supplies. Added HPE Support Services. Added acoustic noise to the Technical Specifications section. |
| 25-Sep-2017 | Version 1 | New | New QuickSpecs. |



Copyright

Make the right purchase decision.
Contact our presales specialists.



Chat



Email



Call



Get updates



© Copyright 2021 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries. Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a00021850enw - 16053 - Worldwide - V36 - 06-April-2021